由 Autodesk 教育版产品制作

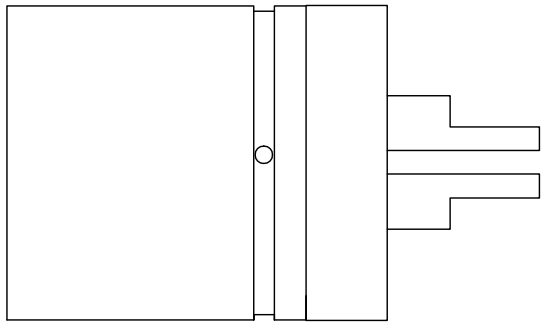

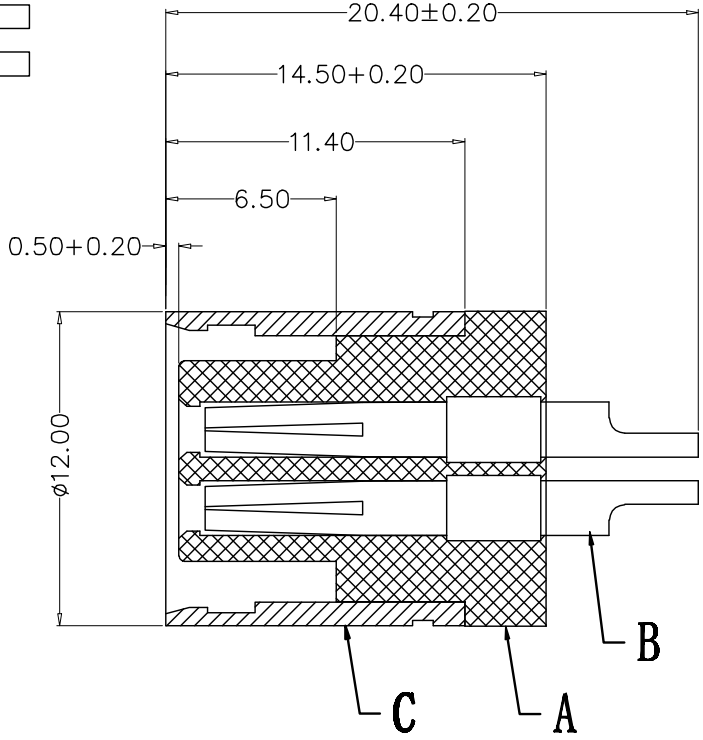

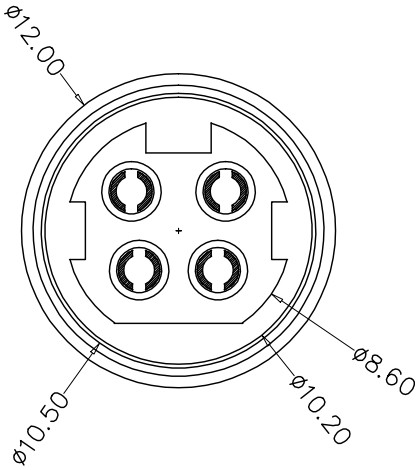

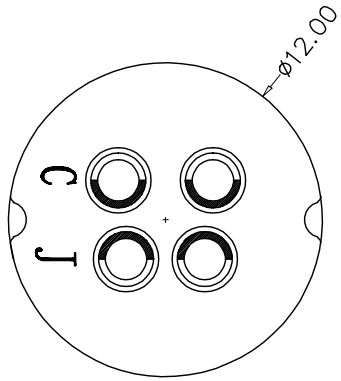

	PARTS	MATERIALS	TREATMENT	AMOUNT
A	HOUSING	PBT+GF	BLACK	1
B	CONTACT	BRONZE	SILVER PLATED	4
C	OUTER CONTACT	BRASS	NICKL PLATED	1
D				
E				
F				
G				

Engagement force	≤35N	Rated volage	24V
Disengagement force	≥35N	Rated current	7.5A
Mechanical lifespan	≥1000	Insulation resistance	≥1000MΩ
IP rating		Contact resistance	≤30mΩ
Flammability	UL94 V-0	Operation Temperature	-25° C~85° C

Dongguan Changjun Electronics Co.,Ltd
东莞市昌骏电子有限公司

TOLERANCE
.xxx ±0.05
.xx ±0.10
.x ±0.30
x ±0.50
ANGLE ±1°

TITLE: POWER DIN 4P 线端母头

PART NO: CJ-PD4-F01

DRAWING NO.: CP-POWER0016

SHEET: 1 / 1 | SCALE: 1 : 1 | UNIT: mm | SIZE: A4 | REV: A/0

DRAWN: Xie Wenjun | CHECK: Long Jichang | DATE: 2022-01-05

由 Autodesk 教育版产品制作