

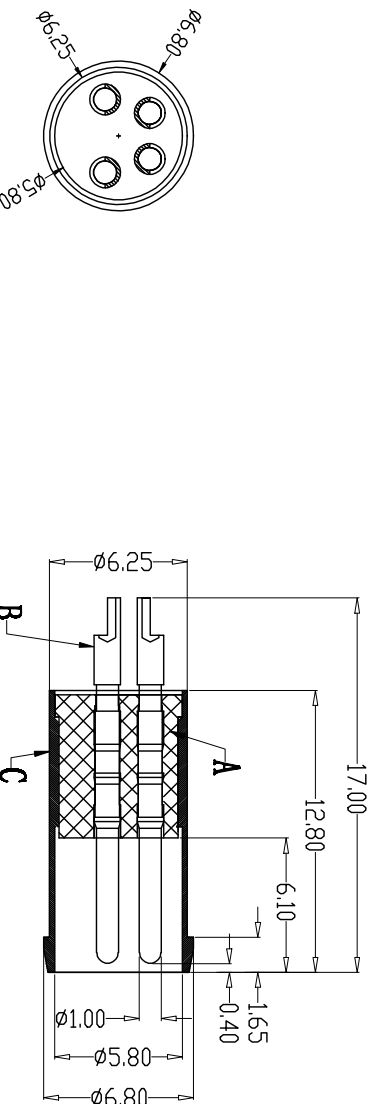




		1		2		3	
A		2pin	3pin	4pin			
	图形						
B	CODE	A-code	A-code	A-code			

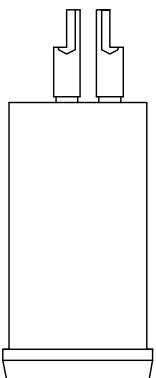

Dongguan Changjun Electronics Co., Ltd 东莞市昌骏电子有限公司										
G			PARTS	MATERIALS	TREATMENT	AMOUNT				
			A	HOUSING	PA66+GF	SPECIFY COLOR	1			
	Engagement force	≤30N		Rated voltage	60V	B	CONTACT	BRASS	GOLD PLATED	2~4
	Disengagement force	≥5N		Rated current	4A	C	SHIELD	BRASS	NICKEL PLATED	1
	Mechanical lifespan	≥500		Insulation resistance	≥1000MΩ	D	NOT	BRASS	NICKEL PLATED	1
	IP rating	IP67/IP68		Contact resistance	≤10mΩ	E				
	Flammability	UL94 V-0		Operation Temperature	-40° C~105° C	F				
H			TOLERANCE							
			±0.05 ±0.10 ±0.10 ±0.30 ±0.50 ±1° ANGLE							
			PART NO.: 规格书/零件图/头壳图/尺寸图 DRAWING NO.: CP-MS0062 CF-MS03 (CF-0-101-1TL) SHEET: SCALE: UNIT: SIZE: REV 1 / 1 1 : 1 mm A4 A/0							
			DRAWMAN: Kite Wenjun CHECK: Long Jiahang DATE: 2022-05-27							