
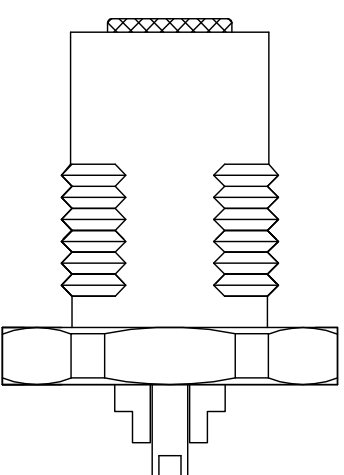
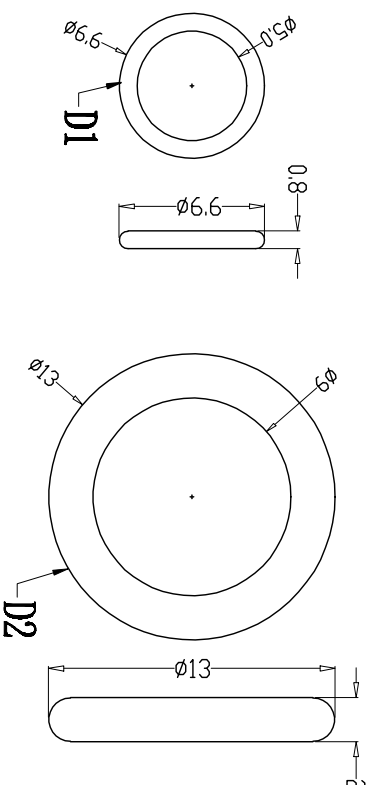
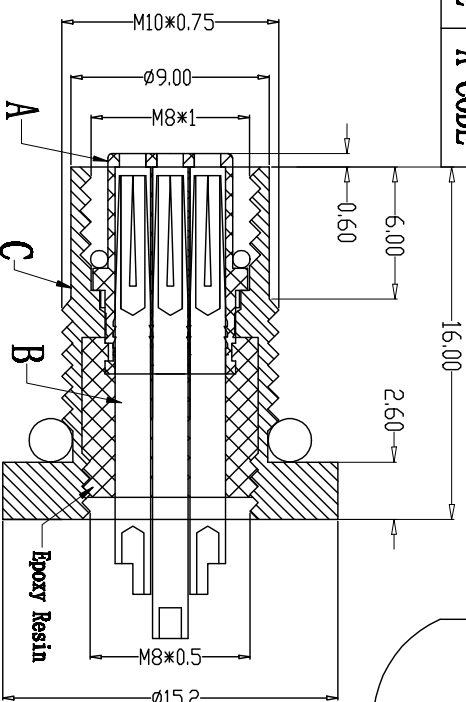
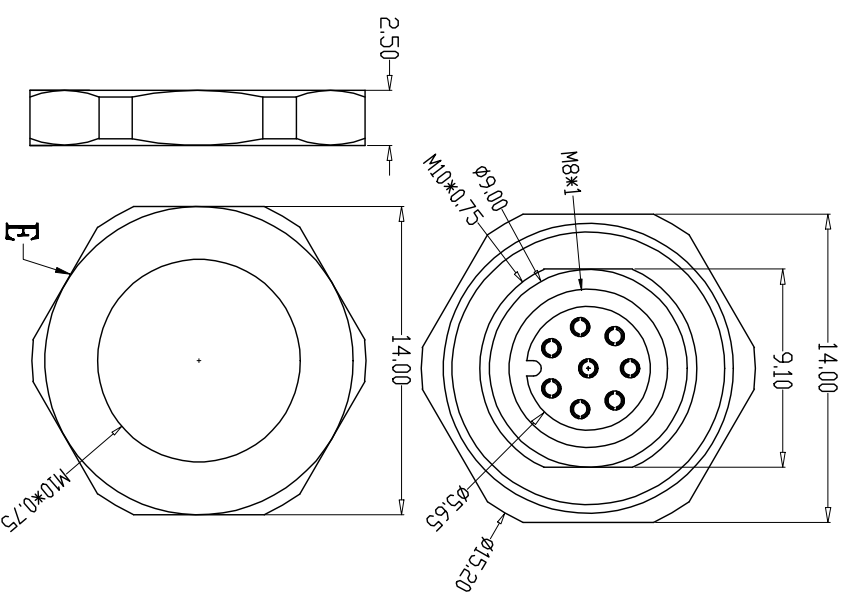
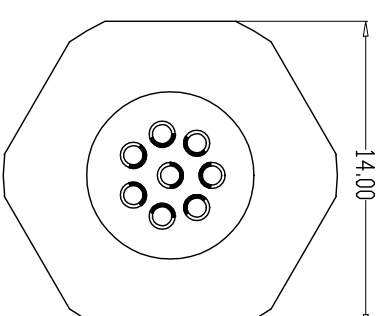


A		B	
图形	编码	图形	编码
	2pin A-CODE		3pin A-CODE
	4pin A-CODE		5pin B-CODE
	6pin A-CODE		8pin A-CODE

Recommended Panel Cut-out



由 Autodesk 教育版产品制作

G	Engagement force	≤50N	Rated voltage	2-5pin:60V DC 6-8pin:30V DC
	Disengagement force	≥5N	Rated current	2-5pin:4A 6-8pin:2A
	Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ
H	IP rating	IP67/IP68	Contact resistance	≤10mΩ
	Flammability	UL94 V-0	Operation Temperature	-40° C~105° C

	PARTS	MATERIALS	TREATMENT	AMOUNT
A	HOUSING	PAGE+GF	SPECIFY COLOR	1
B	CONTACT	BRONZE	GOLD PLATED	2~8
C	OUTER CONTACT	BRASS	NICKL. PLATED	1
D	O-RING	EPDM	BLACK	2
E	NUT	BRASS	NICKL. PLATED	1
F				

Dongguan Changjun Electronics Co., Ltd
东莞市昌骏电子有限公司

TOLERANCES		TITLE:	
· .xx	±0.05	№防次2 30°坡轉母座 前傾面式式01 S7.41-1L	
· .xx	±0.10	PART NO:	DRAWING NO:
· .x	±0.30	CR-690045	CR-1890045
· .x	±0.50	CR-690045-01	
· .x	±1°	SHEET:	SCALE:
· .x	±1°	1 / 1	1 : 1
· .x	±1°	UNIT:	SIZE:
· .x	±1°	mm	A4
· .x	±1°	DATE:	A/O
· .x	±1°	DRAWN:	CHECK:
· .x	±1°	Xie Wenjun	Long Jiahang
· .x	±1°	2022-01-05	

由 Autodesk 教育版產品制作