

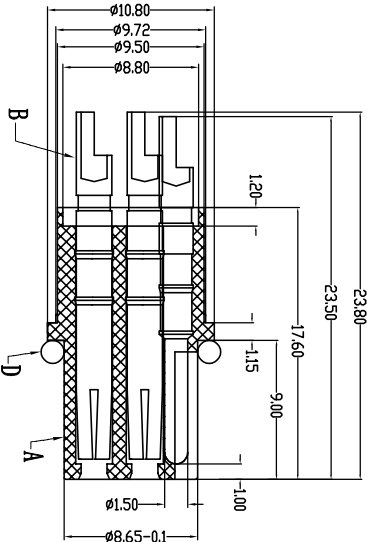
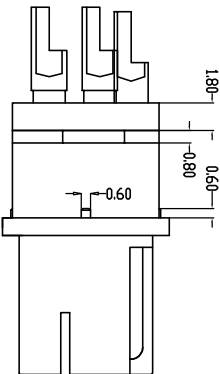

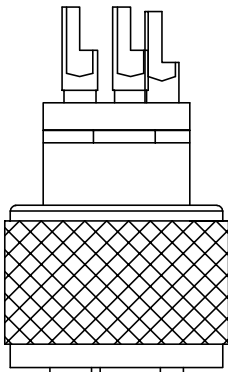



| pin位 | 3pin | 4pin | 5pin |
|------|------|------|------|
| 图形   |      |      |      |

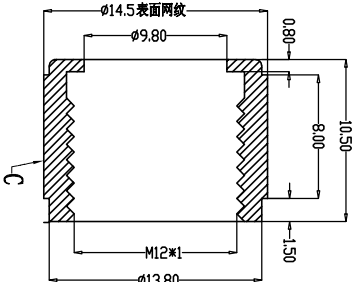

Dongguan Changjun ElectronicsCo., LTD  
东莞市昌骏电子有限公司

| Engagement force    | ≤50N      | Rated voltage         | 800V          |
|---------------------|-----------|-----------------------|---------------|
| Disengagement force | ≥10N      | Rated current         | 16A           |
| Mechanical lifespan | ≥500      | Insulation resistance | ≥1000M Ω      |
| IP rating           | IP67/IP68 | Contact resistance    | ≤10m Ω        |
| Flammability        | UL94 V-0  | Operation Temperature | -40° C~105° C |

| TOLERANCE |            |                         |              | TITLE:                      |  |          |  |
|-----------|------------|-------------------------|--------------|-----------------------------|--|----------|--|
| .xxx      | ±0.05      | .xx                     | ±0.10        | M12防水3芯线端母头K-C008+10.5L网纹螺母 |  |          |  |
| .x        | ±0.30      | x                       | ±0.50        | PART NO: CJ-M12E(3)K-F01    |  |          |  |
| ANGLE     | ±1°        | DRAWING NO.: CP-M120305 |              | SHEET: 1 / 1                |  |          |  |
| DRAWN:    | Xie Wenjun | CHECK:                  | Long Jichang | SCALE: 1 : 1                |  |          |  |
| DATE:     | 2023-03-05 | UNIT:                   | mm           | SIZE: A4                    |  | REV: A/0 |  |