

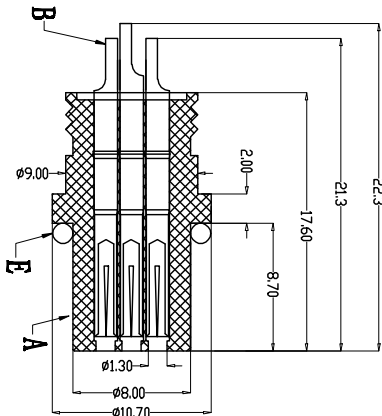

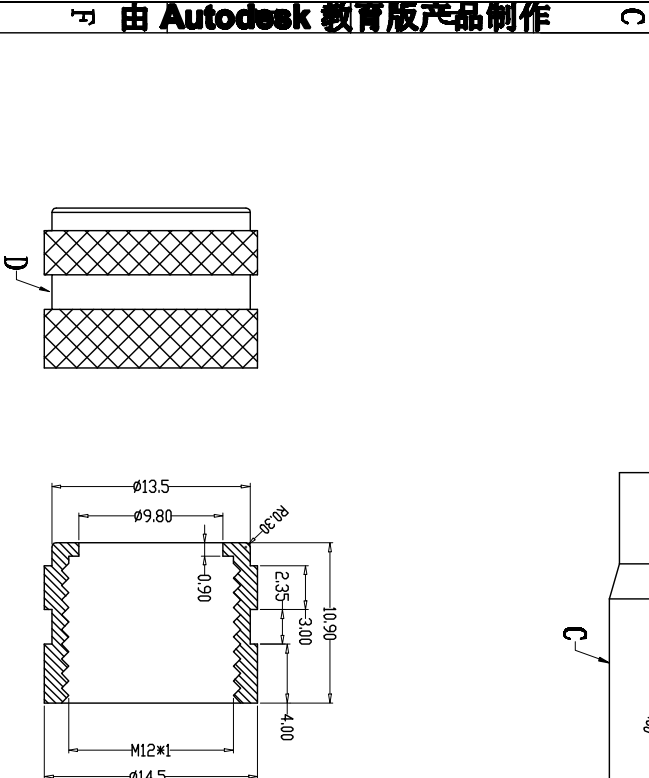
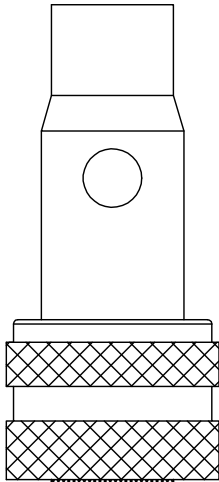
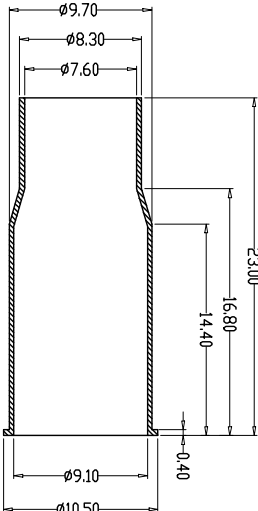


1			2			3		
Pin位	2Pin	3Pin	4Pin	5Pin	6Pin	7Pin	8Pin	
A-CODE 图形								

B-CODE 图形				
--------------	--	--	--	--

D-CODE 图形			
--------------	--	--	--



由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

PARTS		MATERIALS		TREATMENT		AMOUNT	
A	HOUSING	PA66+GF		GOLD PLATED		1	
B	CONTACT	BRONZE		NICKEL PLATED		2*8	
C	OUTER CONTACT	BRASS		NICKEL PLATED		1	
D	NUT	BRASS		NICKEL PLATED		1	
E	O-RING	EPDM		BLACK		1	

Engagement force	≤50N	Rated voltage	250VAC/125VDC
Disengagement force	≥5N	Rated current	2A
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ
IP rating	IP67/IP68	Contact resistance	≤10mΩ
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C

Dongguan Changjun Electronics Co., Ltd
东莞市昌骏电子有限公司

TITLE:	H1防水型线束母头+23.0压接排线管+10.0压接排线管		
PART NO:	CJ-H120198		
SCALE:	1 : 1	UNIT:	mm
SHEET:	1 / 1	SCALE:	1 : 1
DRAWN:	Xie Wenjun	CHECK:	Long Jichang
DATE:	2022-07-19		