

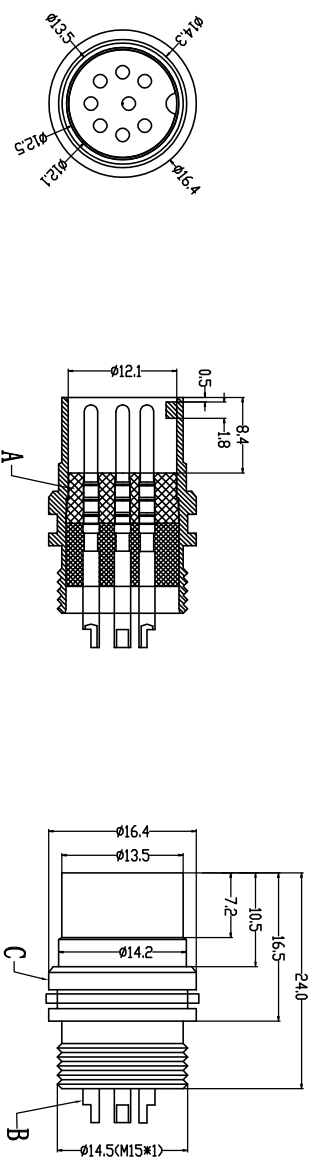


PIN数	3pin	4pin	5pin	6pin	7pin	8pin	12pin	14pin	16pin	19pin	24pin
图纸											
接触直径	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.00mm	1.00mm	1.00mm	1.00mm	0.50mm

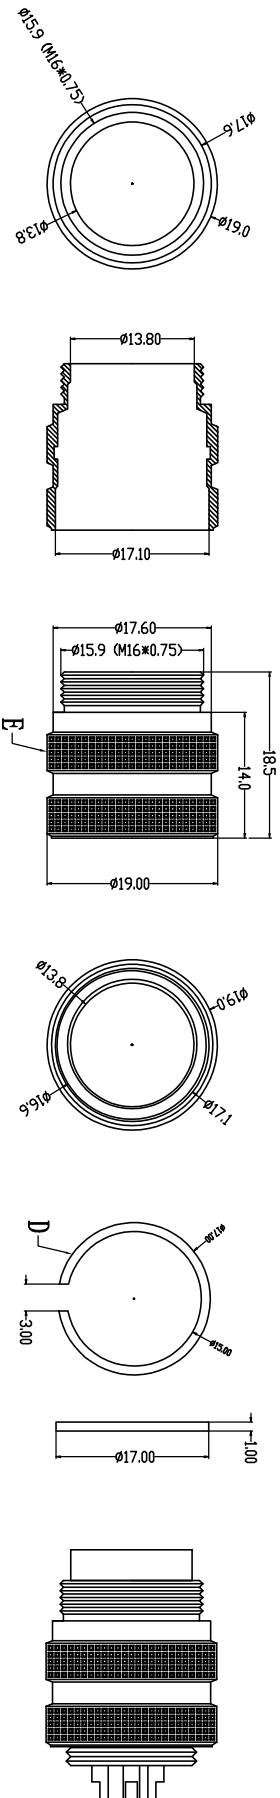

										Dongguan Changjun Electronics Co., LTD									
										东莞市昌骏电子有限公司									
		PARTS		MATERIALS		TREATMENT		AMOUNT											
		A		HOUSING		PBT+GF		BLACK											
Engagement force		≤60N		Rated volage		3.8pin:250V 12*19pin:60V 24pin:60V		B		CONTACT		BRASS		GOLD PLATED		3~24			
Disengagement force		≥15N		Rated current		3.8pin:5A 12*19pin:3A 24pin:1A		C		OUTER CONTACT		BRASS		NICKL PLATED		1			
Mechanical lifespan		≥500		Insulation resistance		≥1000M Ω		D		SNAP RING		SS		NATURAL COLOR		1			
IP rating		IP65/IP67		Contact resistance		≤10m Ω		E		NUT		BRASS		NICKL PLATED		1			
Flammability		UL94 V-0		Operation Temperature		-25° C~105° C		F											
1		2		3		4		5		6		7		8					