
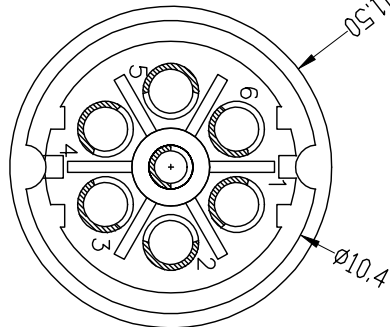
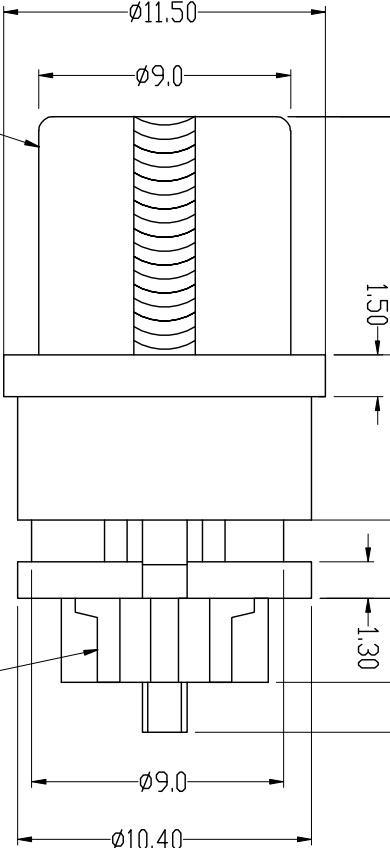
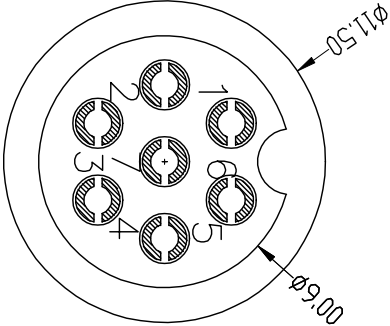
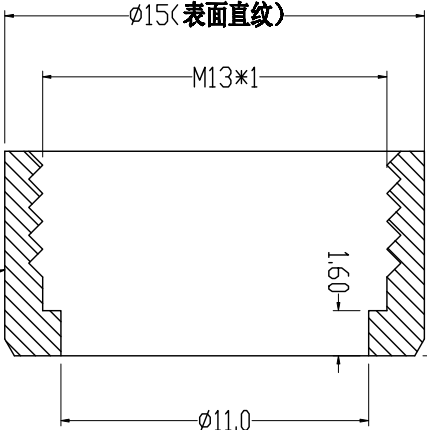
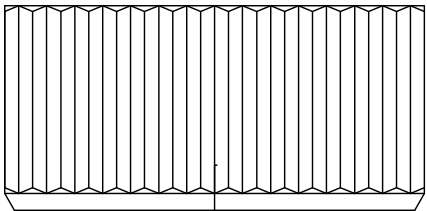


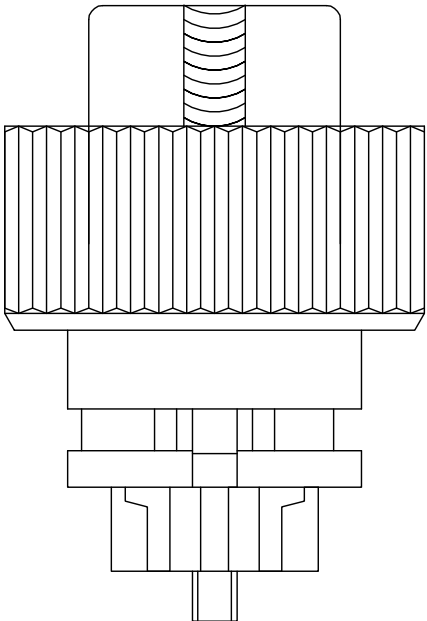

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

Engagement force	≤50N	Rated voltage	60V
Disengagement force	≥10N	Rated current	6A
Mechanical lifespan	≥500	Insulation resistance	≥1000M Ω
IP rating	IP65/IP67	Contact resistance	≤10m Ω
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C

PARTS	MATERIALS	TREATMENT	AMOUNT
A	HOUSING	PBT+GF	BLACK
B	CONTACT	BRONZE	SILVER PLATED
C	NUT	BRASS	NICKEL PLATED
D			
E			
F			

TOLERANCE		TITLE:	
.xxx	±0.05	G112航空7P转接插头(侧身型)	
.xx	±0.10	PART NO:	
.x	±0.20	DRAWING NO.:	
ANGLES	± 1°	SHEET: 1 / 1	
DRAWN: Xie Wenjun		CHECK: Long Jichang	
DATE: 2022-01-05		SCALE: 1 : 1	
		UNIT: mm	
		SIZE: A4	
		REV: A/0	

东莞市昌骏电子有限公司