

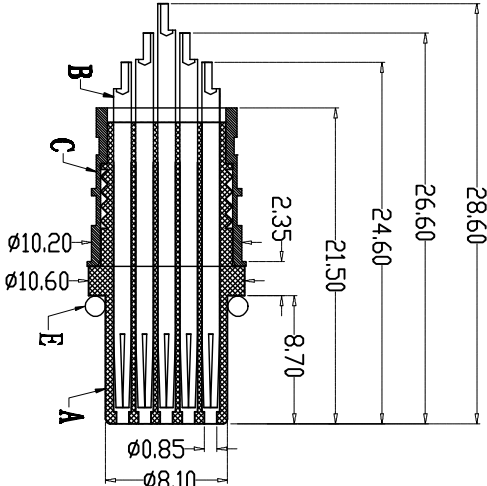

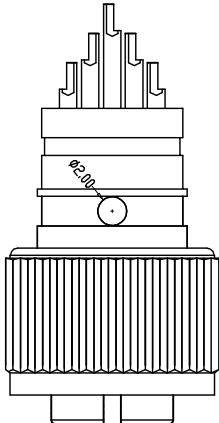



1		2		3		4		5		6		7		8	
A		9pin		10pin		11pin		12pin		13pin		14pin		15pin	
A		16pin		17pin											



由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

PARTS		MATERIALS		TREATMENT		AMOUNT	
A		HOUSING		PA66+GF		GOLD PLATED	
B		CONTACT		BRONZE		9~17	
C		OUTER CONTACT		BRASS		NICKEL PLATED	
D		NUT		BRASS		NICKEL PLATED	
E		O-RING		EPDM		BLACK	
F							
Engagement force		≤50N		Rated volage		30V	
Disengagement force		≥10N		Rated current		1.5A	
Mechanical lifespan		≥500		Insulation resistance		≥1000MΩ	
IP rating		IP67/IP68		Contact resistance		≤10mΩ	
Flammability		UL94 V-0		Operation Temperature		-40° C~105° C	

Dongguan Changjun Electronics Co., LTD
东莞市昌骏电子有限公司

TOLERANCE		TITLE:	
±0.05	±0.10	H12防水9~17针密封插头插座+10L直拉插母	
±0.10	±0.20	PART NO:	
±0.20	±0.50	CJ-H12C9(17)A-F11	
±0.50	±1.0	SHEET:	
±1.0	±2.0	1 / 1	
±2.0	±5.0	SCALE:	
±5.0	±10.0	1 : 1	
±10.0	±20.0	UNIT:	
±20.0	±50.0	mm	
±50.0	±100.0	SIZE:	
±100.0	±200.0	REV	
±200.0	±500.0	A/0	
±500.0	±1000.0	DRAWN:	
±1000.0	±2000.0	Xie Wenjun	
±2000.0	±5000.0	CHECK:	
±5000.0	±10000.0	Long Jichang	
±10000.0	±20000.0	DATE:	
±20000.0	±50000.0	2022-01-05	