



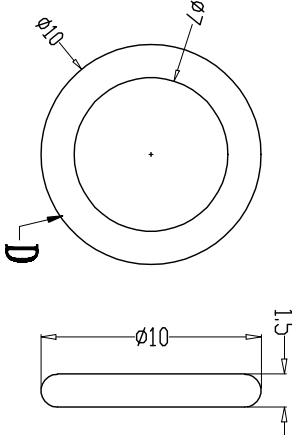
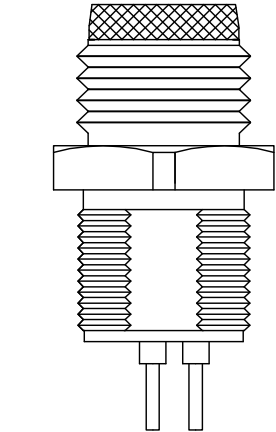

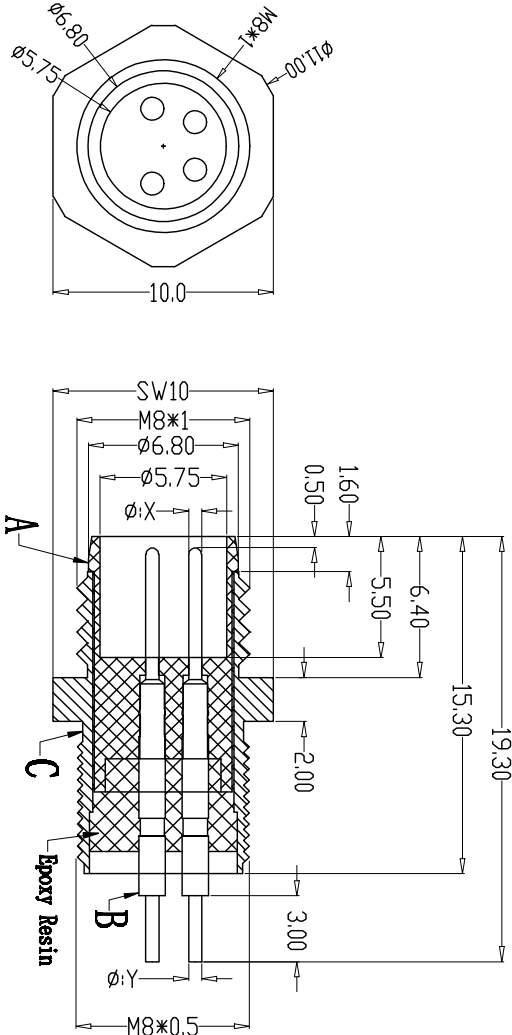


Recommended Panel Cut-out

1		2		3	
	2pin	3pin	4pin	5pin	6pin
图形					
CODE	A-code	A-code	A-code	B-code	A-code
X值	1.00	1.00	1.00	1.00	0.72
Y值	1.00	1.00	1.00	1.00	0.60



PCB Layout Reference

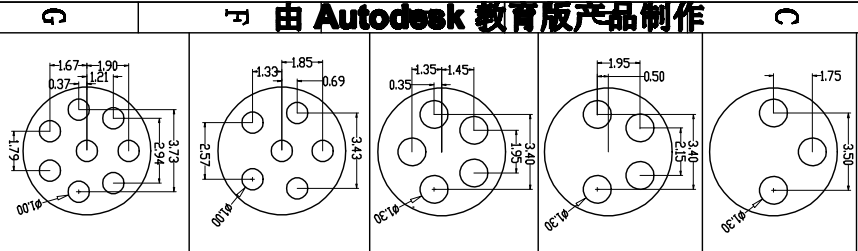

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

PARTS		MATERIALS		TREATMENT		AMOUNT	
A	HOUSING	PA66+GF		GOLD PLATED		1	
B	CONTACT	BRASS		NICKEL PLATED		2*8	
C	OUTER CONTACT	BRASS		BLACK		1	
D	O-RING	EPDM		NICKEL PLATED		1	
B	NUT	BRASS		NICKEL PLATED		1	

Engagement force		≤50N	Rated voltage	2-5pin:60V DC 6-9pin:30V DC
Disengagement force		≥5N	Rated current	2-5pin:4A 6-9pin:2A
Mechanical lifespan		≥500	Insulation resistance	≥1000MΩ
IP rating		IP67/IP68	Contact resistance	≤10mΩ
Flammability		UL94 V-0	Operation Temperature	-40° C~105° C

Dongguan Changjun Electronics Co., Ltd		TITLE:	
东莞市昌骏电子有限公司		PART NO:	
		DRAWING NO.:	
		SCALE:	
		UNIT:	
		SIZE:	
		REV:	
		A/O	