
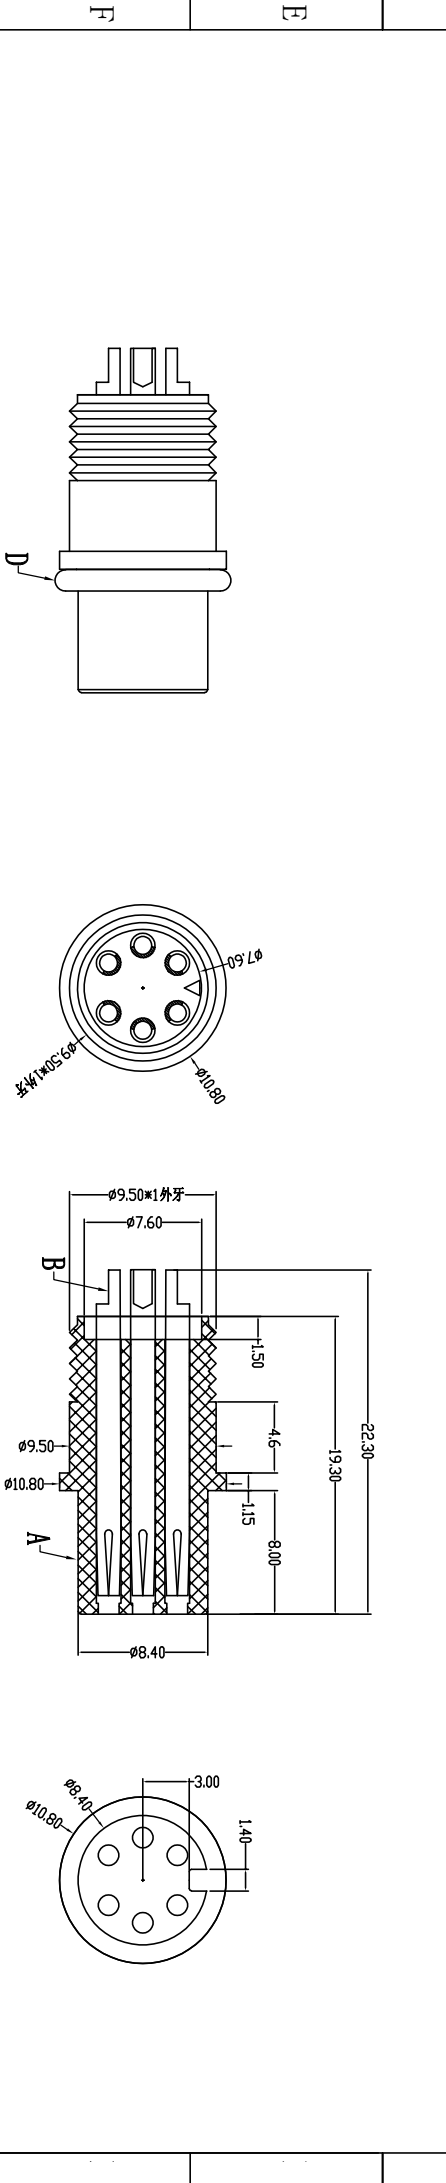


pin位	2pin	3pin	4pin	5pin	6pin-240°	6pin-258°	6pin-49°	6pin-54°	7pin	8pin
通配公 针直径	1.50	1.50	1.00	1.00	1.00	1.00	1.00	0.80	1.00	1.00
图形										

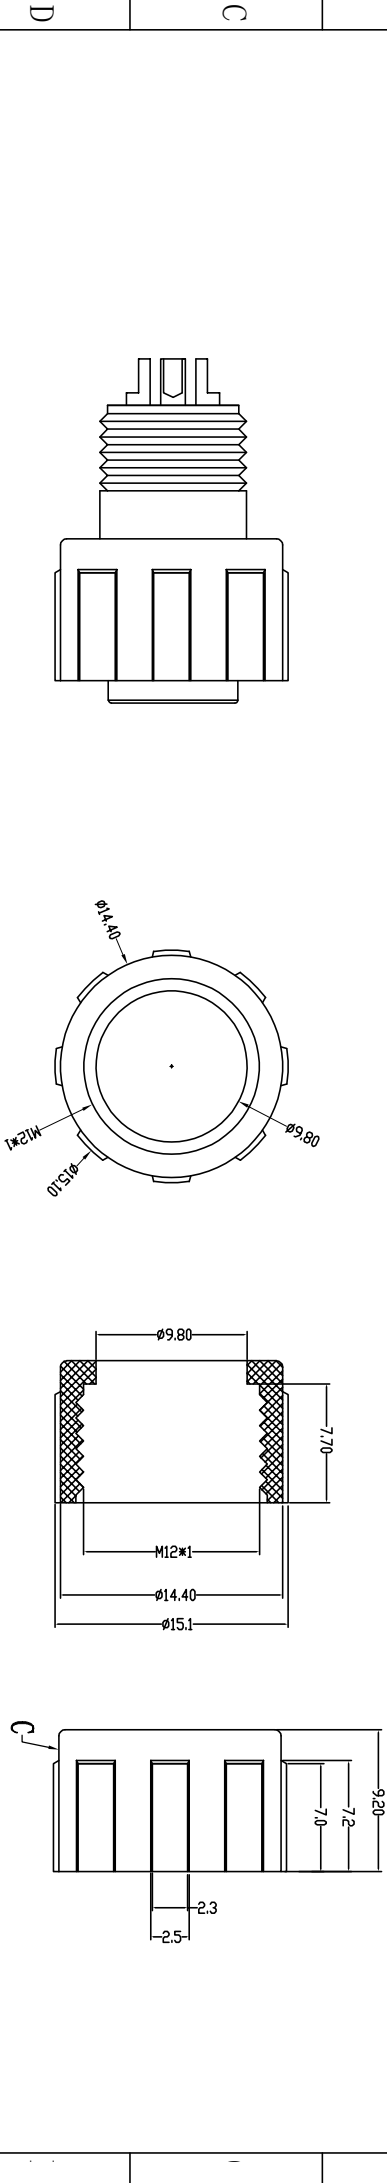

PARTS	MATERIALS	TREATMENT	AMOUNT	Dongguan Changjun ElectronicsCo., LTD 东莞市昌骏电子有限公司			
A HOUSING	PA66+GF	BLACK	1	TITLE: M12防水2芯线端母头Z-S款 PART NO: CJ-M12S(2*8)-F01 DRAWING NO.: CP-M120299			
B CONTACT	BRONZE	GOLD PLATED	2~8				
C NUT	PA66+GF	BLACK	1				
D 0-RING	EPDM	RED	1				

H									
Engagement force	≤50N	Rated volage	2-5pin:60V 6-8pin:30V	B	CONTACT	BRONZE	GOLD PLATED	2~8	TOLERANCE · xxx ±0.05 ±0.10 · xx ±0.30 · x ±0.50 x ANGLE ± 1°
Disengagement force	≥5N	Rated current	2pin: 7.5A 3-8pin:4A	C	NUT	PA66+GF	BLACK	1	
Mechanical lifespan	≥500	Insulation resistance	≥1000M Ω	D	0-RING	EPDM	RED	1	
IP rating	IP67/IP68	Contact resistance	≤10m Ω	E					
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C	F					
1	2	3	4	5	6	7	8		