

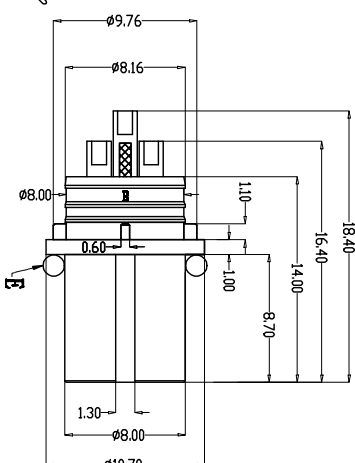


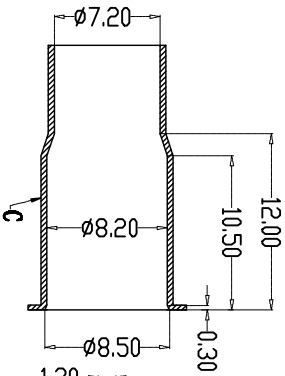
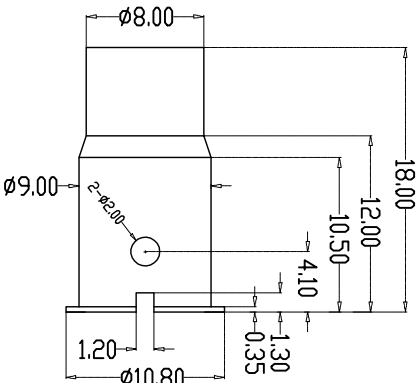






A	1			2			3			B
	Pin位	2Pin	3Pin及3	4Pin	5Pin及方形	6Pin	7Pin	8Pin		
A-CODE 图形										
B-CODE 图形										
D-CODE 图形										

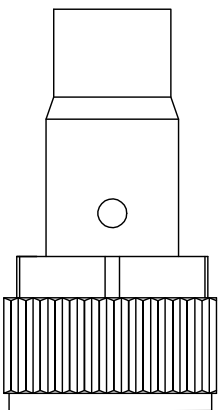

G							Dongguan Changjun Electronics Co., LTD 东莞市昌骏电子有限公司							
							TITLE: H1208A2 带插针母头座+阻焊膏+带示数螺母		DRAWING NO.: CJ-H120227					
							PART NO.: CJ-H120270A-F11		DRAWING NO.: CJ-H120227					
							SHEET: 1 / 1		SCALE: 1:1					
H	Engagement force	≤50N	Rated voltage	$\frac{2}{3}U_{n-100V}$ $\frac{2}{3}U_{n-30V}$	B	CONTACT	BRONZE	GOLD PLATED	2*8	TOLERANCE ±0.05 ±0.10 ±0.30 ±0.50 ANGLE ±1°		DRAWN: Xie Tianjun	CHECK: Long Jichang	DATE: 2022-08-11
	Disengagement force	≥5N	Rated current	$\frac{2}{3}I_{n-10A}$ $\frac{2}{3}I_{n-3A}$	C	OUTER CONTACT	BRASS	NICKEL PLATED	1					
	Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ	D	NUT	BRASS	NICKEL PLATED	1					
	IP rating	IP67/IP68	Contact resistance	≤10mΩ	E	O-RING	EPDM	BLACK	1					
	Flammability	UL94 V-0	Operation Temperature	-40° C~105° C	F									
1	2	3	4	5	6	7	8							