








1	2	3	4	5	6	7	8
pin位	2pin	3pin	4pin	5pin	6pin	7pin	8pin
X 值	1.50	1.00	1.00	1.00	1.00	1.00	1.00
图形							

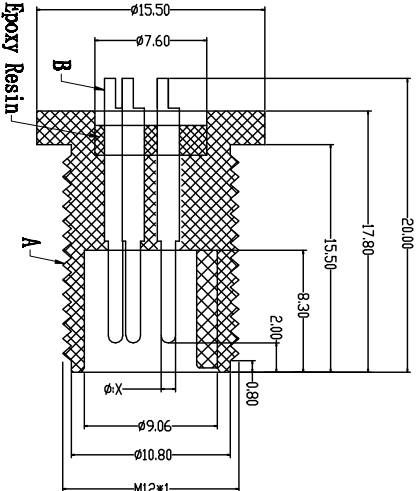

Recommended Panel Cut-out



Engagement force	≤50N	Rated volage	Rated current	Rated voltage	Rated current	Rated voltage	Rated current
Disengagement force	≥5N	Rated current	Rated voltage	Rated current	Rated voltage	Rated current	Rated voltage
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ	Insulation resistance	≥1000MΩ	Insulation resistance	≥1000MΩ
IP rating	IP67/IP68	Contact resistance	≤10mΩ	Contact resistance	≤10mΩ	Contact resistance	≤10mΩ
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C	Operation Temperature	-40° C~105° C	Operation Temperature	-40° C~105° C

PARTS	MATERIALS	TREATMENT	AMOUNT
A	HOUSING	PAGE+GF	BLACK
B	CONTACT	BRASS	GOLD PLATED
C	SHIM	SILICA GEL	BLACK
D	NTT	PAGE+GF	BLACK

TOLERANCE		TITLE:	
±0.05	±0.10	H12防水型连接器公共 前侧面板式-ALC/款	
±0.10	±0.20	PART NO.:	
±0.20	±0.30	CG-H1271X(2)-3010-ALC	
±0.30	±0.40	SHEET:	
±0.40	±0.50	CG-H120115	
±0.50	±0.60	SCALE:	
±0.60	±0.70	1 / 1	
±0.70	±0.80	1 : 1	
±0.80	±0.90	UNIT:	
±0.90	±1.00	mm	
±1.00	±1.10	SIZE:	
±1.10	±1.20	A4	
±1.20	±1.30	REV	
±1.30	±1.40	A/0	
±1.40	±1.50	DATE:	
±1.50	±1.60	2022-01-05	