	2pin	3pin	4pin	4pin	5pin	6pin	8pin
图形							
CODE	A-code	A-code	A-code	D-code	B-code	A-code	A-code
X值	1.00	1.00	1.00	0.80	1.00	0.72	0.60

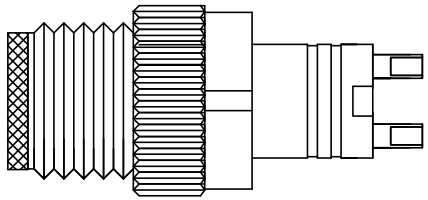



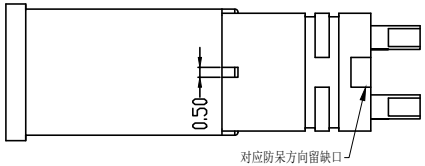

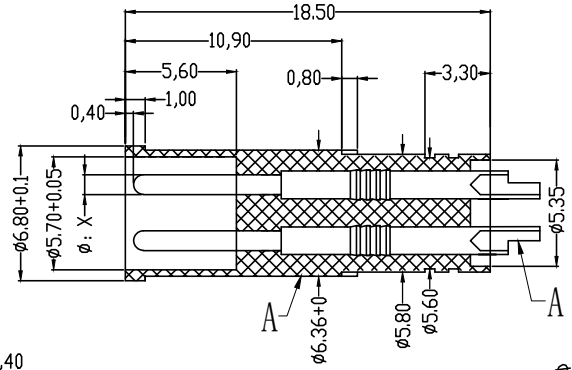





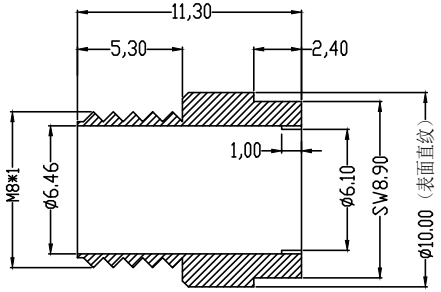





Engagement force	≤40N	Rated volage	2-5pin:60V DC 6-8pin:30V DC
Disengagement force	≥5N	Rated current	2-5pin:4A 6-8pin:2A
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ
IP rating	IP67/IP68	Contact resistance	≤10mΩ
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C

	PARTS	MATERIALS	TREATMENT	AMOUNT
A	HOUSING	PA66+GF	SPECIFY COLOR	1
B	CONTACT	BRASS	GOLD PLATED	2~8
C	NUT	BRASS	NICKL PLATED	1
D				
E				
F				

Dongguan Changjun Electronics Co.,Ltd
东莞市昌骏电子有限公司

TOLERANCE
.xxx ±0.05
.xx ±0.10
.x ±0.30
x ±0.50
ANGLE ±1°

TITLE: M8防水2~8P线端公头C款+11.3L防振动六角螺丝

PART NO: CJ-M8CXB(2~8)-M02-11.3L

DRAWING NO.: CP-M80002

SHEET:	SCALE:	UNIT:	SIZE:	REV
1 / 1	1 : 1	mm	A4	A/0

DRAWN:	CHECK:	DATE:
Xie Wenjun	Long Jichang	2022-01-05