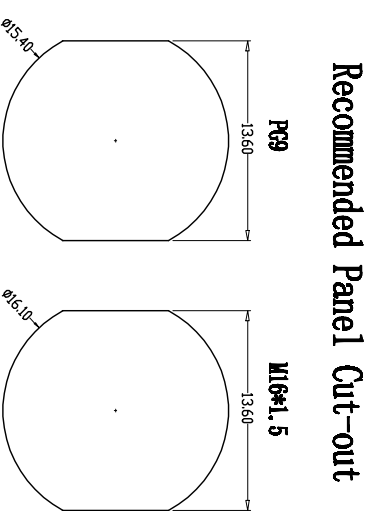
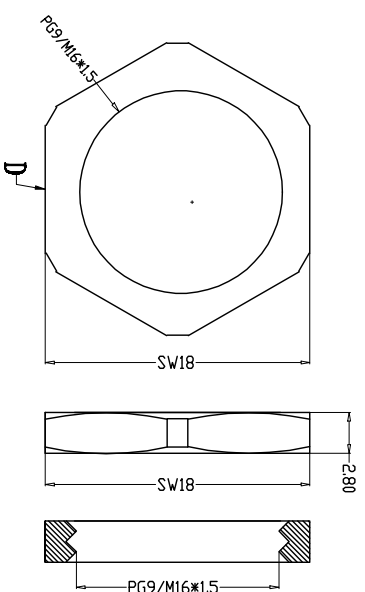

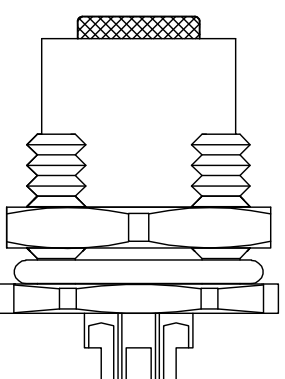
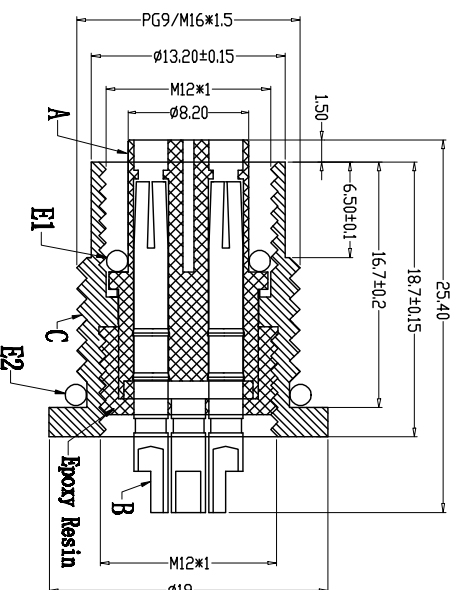


1		2	
pin位	2pin	3pin	4pin
A			
	图形		

[illegible]

G	Engagement force	≤50N
	Disengagement force	≥10N
	Mechanical lifespan	≥500
	IP rating	IP67/IP68
H	Flammability	UL94 V-0

Rated voltage	50C AC/63V DC
Rated current	12A
Insulation resistance	$\geq 1000M \Omega$
Contact resistance	$\leq 10m \Omega$
Operation Temperature	-40° C~105° C

	PARTS	MATERIALS	TREATMENT	AMOUNT
A	HOUSING	PAGE+GF	SPECIFY COLOR	1
B	CONTACT	BRONZE	GOLD PLATED	2"4
C	OUTER CONTACT	BRASS	NICKL. PLATED	1
D	NUT	BRASS	NICKL. PLATED	1
E	O-RING	EPPM	BLACK	2
F				

 		TOLERANCES .XXX ±0.05 .XX ±0.10 .X ±0.50 ANGLES ± 1°	
TITLE: WJ284无线耳机头工厂用 特制而成CP-20/W16 SW/TT		PART NO: CP-20/W16 SW/TT	
SHEET: 1 / 1		SCALE: 1 : 1	
DRAWN: Xie Yuntao	CHECK: Long Jiahong	DRAWING NO.: CP-20/W16 SW/TT	DATE: 2022-05-25