
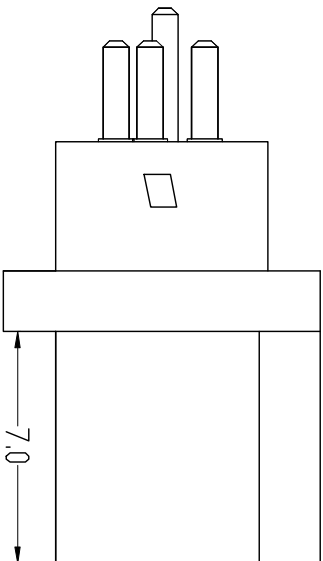
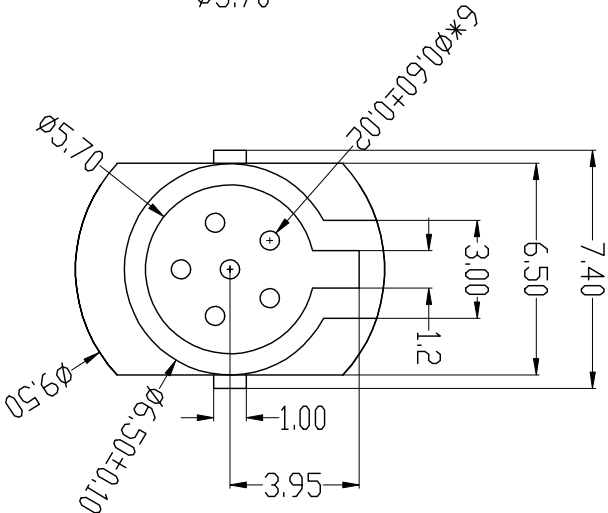
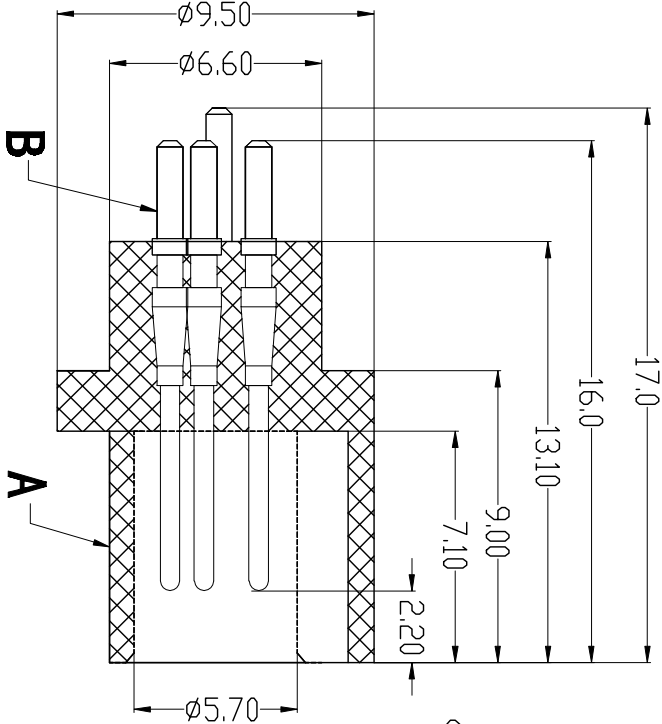


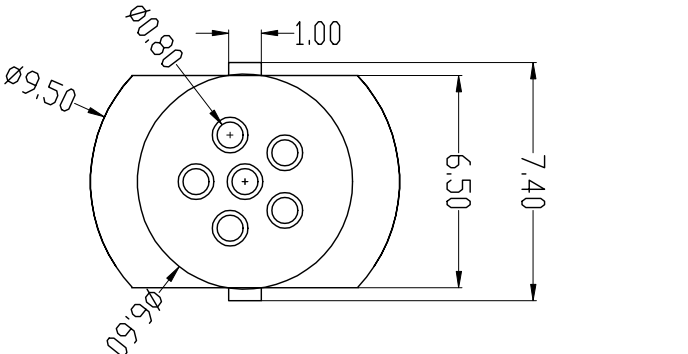

由 Autodesk 教育版产品制作

Engagement force	≤50N	Rated voltage	24V
Disengagement force	≥25N	Rated current	2A
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ
IP rating		Contact resistance	≤10mΩ
Flammability	UL94 V-0	Operation Temperature	-25° C~86° C

PARTS	MATERIALS	TREATMENT	AMOUNT
A HOUSING	PA66+GF	BLACK	1
B CONTACT	BRASS	SILVER PLATED	6

Dongguan Changjun Electronics Co., Ltd			
东莞市昌骏电子有限公司			
TITLE:		宝马充电桩公共(站桩)	
PART NO:		CJ-BMG-M11	
DRAWING NO.:		CJ-BMG014	
SHEET:		1 / 1	
SCALE:		1 : 1	
UNIT:		mm	
SIZE:		A4	
REV		A/0	
DRAWN:		Xie Wenjun	
CHECK:		Long Jiehang	
DATE:		2022-01-05	

由 Autodesk 教育版产品制作