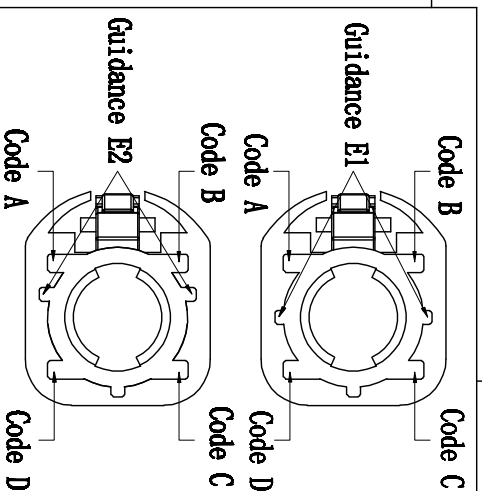
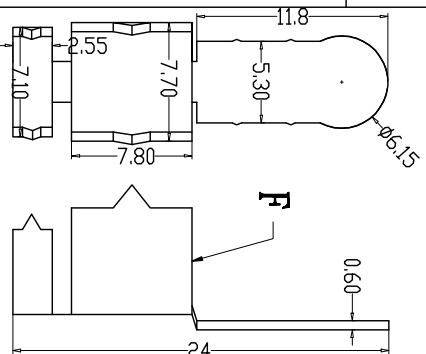
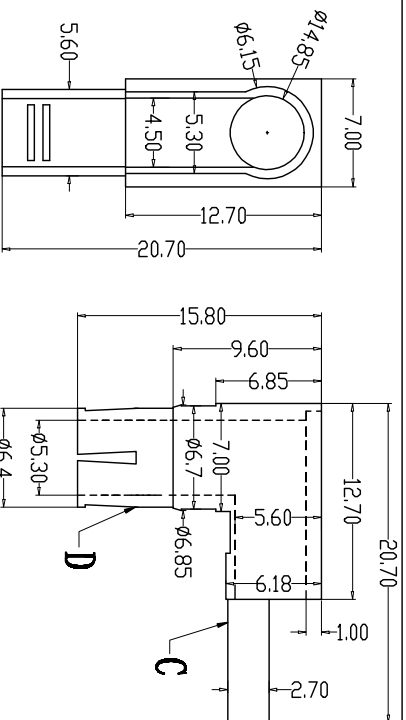

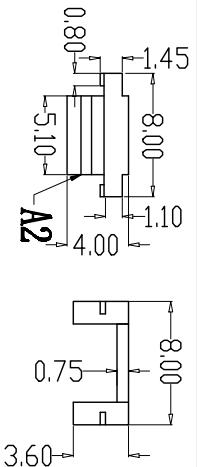
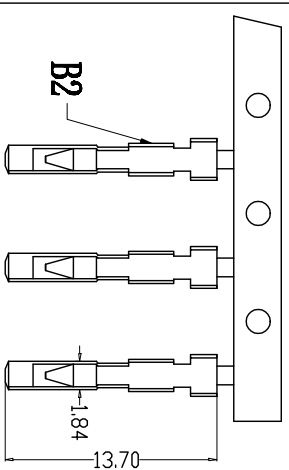
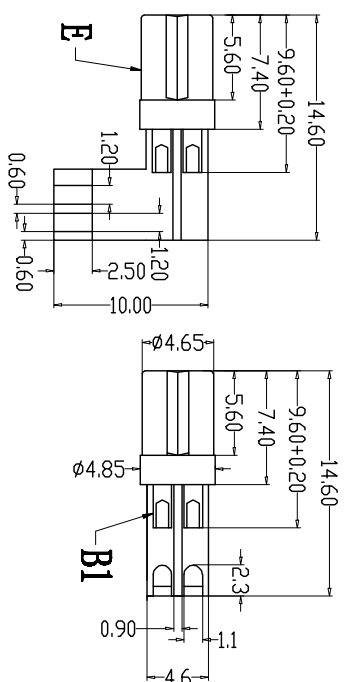
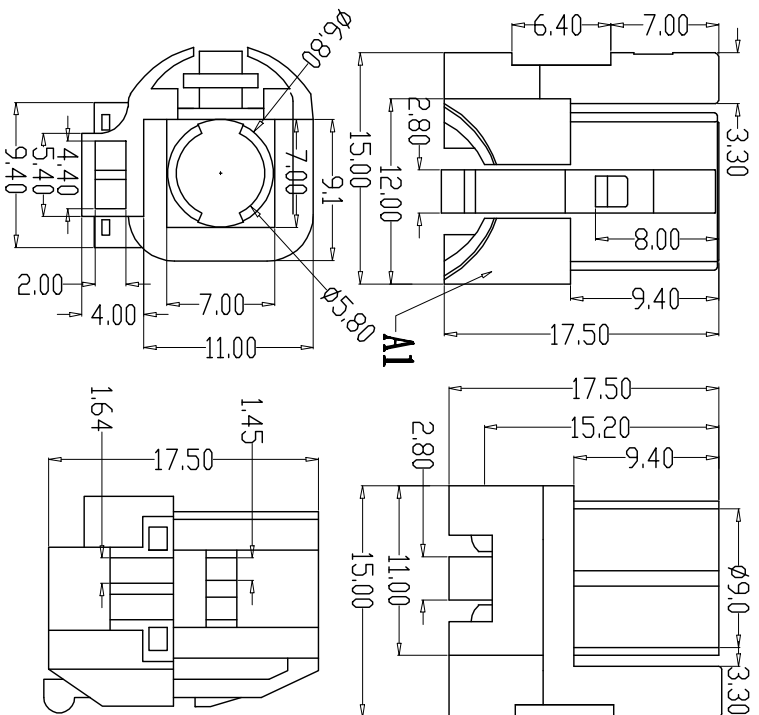


[illegible]

G		PARTS		MATERIALS	TREATMENT	AMOUNT	Dongguan Changjun Electronics Co., LTD 东莞市昌骏电子有限公司						
		A	HOUSING	PBT+GF	SPECIFY COLOR	1+1	TITLE: HSD 4+2插头 线端弯头 (焊线式)	PART NO: CF-HSD0022	DRAWING NO.: CF-HSD0022	UNIT: mm	SCALE: 1 : 1	SIZE: A4	REV: A/0
		B	CONTACT	BRONZE	GOLD PLATED	4+2							
		C	OUTER CONTACT	ZINC ALLOY	NICKEL PLATED	1							
Engagement force	≤30N	Rated voltage	100V	B	CONTACT	BRONZE	GOLD PLATED	4+2	TOLERANCE ±0.05 ±0.10 ±0.20 ±0.50 ±1.0 ANGLE				
Disengagement force	≥5N	Rated current	≤3A	C	OUTER CONTACT	ZINC ALLOY	NICKEL PLATED	1	SHEET: 1 / 1				
Mechanical lifespan	≥200	Insulation resistance	≥1000MΩ	D	OUTER CONTACT	BRASS	NICKEL PLATED	1	SHEET: 1 / 1				
IP rating		Contact resistance	≤10mΩ	E	HOUSING	PA66+GF	TRANSLUCENT	1	SHEET: 1 / 1				
Flammability	UL94 V-0	Operation Temperature	-40℃~105℃	F	SHIELD	SPEC-SD	NICKEL PLATED	1	SHEET: 1 / 1				
H									DRAWN: Xie Fengjun CHECKED: Long Jiechang DATE: 2022-01-05				