
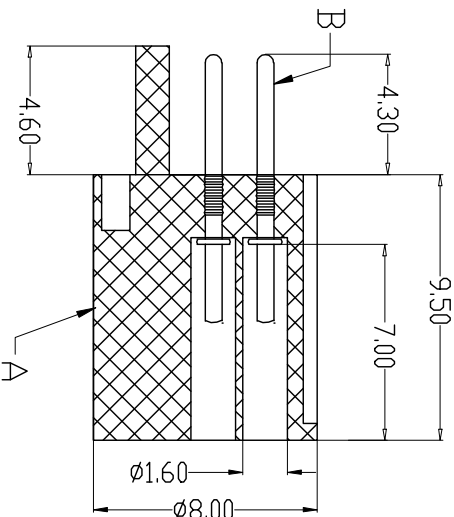
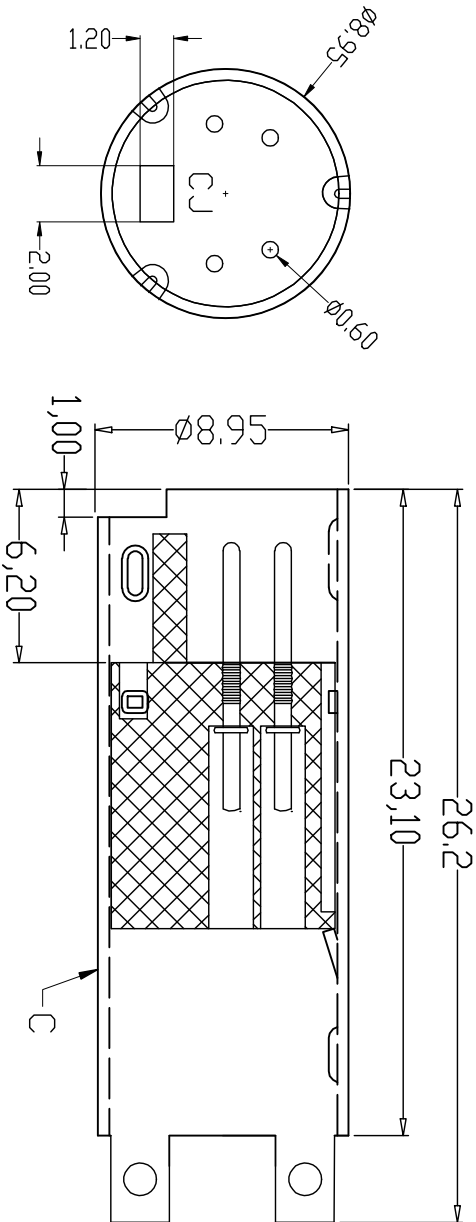
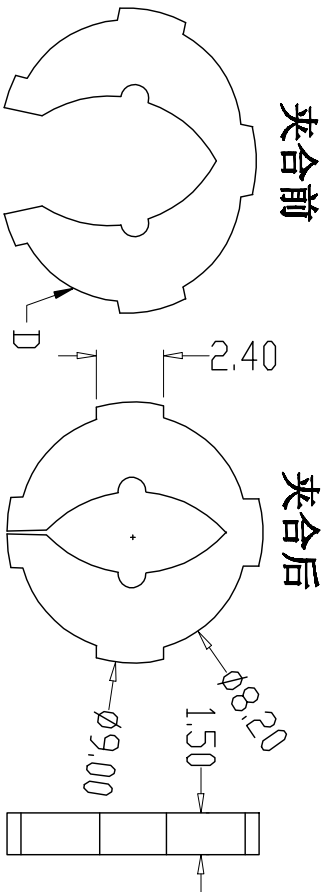
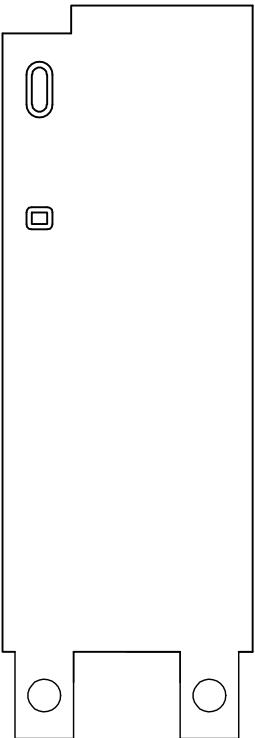


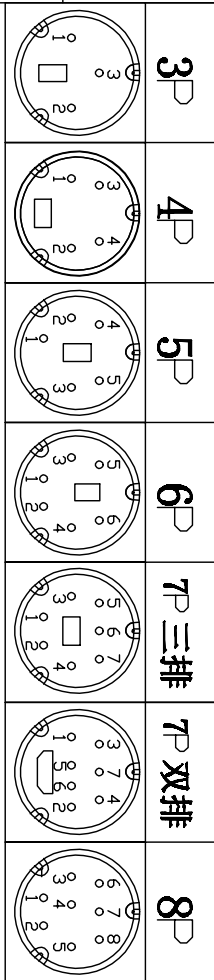

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

PARTS		MATERIALS	TREATMENT	AMOUNT
A	HOUSING	PBT+GF	BLACK	1
B	CONTACT	BRASS	GOLD PLATED	3*8
C	OUTER CONTACT	BRASS	GOLD PLATED	1
D	CLAMP	BRASS	NICKEL PLATED	1
E				
F				
Dongguan Changjun Electronics Co., Ltd 东莞市昌骏电子有限公司				
TITLE: 标准 DIN 3 芯公头 (压接式) 标准直头长管				
PART NO: CJ-MD(3)H-M21				
SHEET: 1 / 1				
SCALE: 1 : 1				
UNIT: mm				
SIZE: A4				
REV: A/0				
DRAWN: Xie Tengjun				
CHECK: Long Jichang				
DATE: 2022-01-05				
TOLERANCE: .xxx ±0.05				
.xx ±0.10				
.x ±0.20				
ANGLES ± 1°				
Engagement force	≤40N	Rated voltage	24V	
Disengagement force	≥10N	Rated current	2A	
Mechanical lifespan	≥2000	Insulation resistance	≥1000M Ω	
IP rating		Contact resistance	≤10m Ω	
Flammability	UL94 V-0	Operation Temperature	-25° C~85° C	