
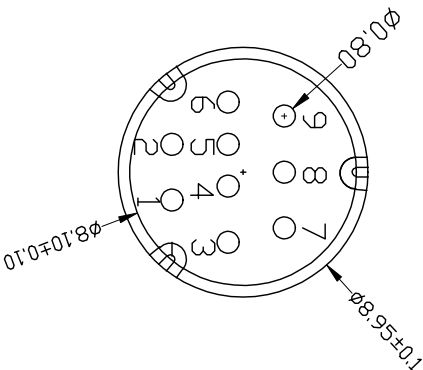
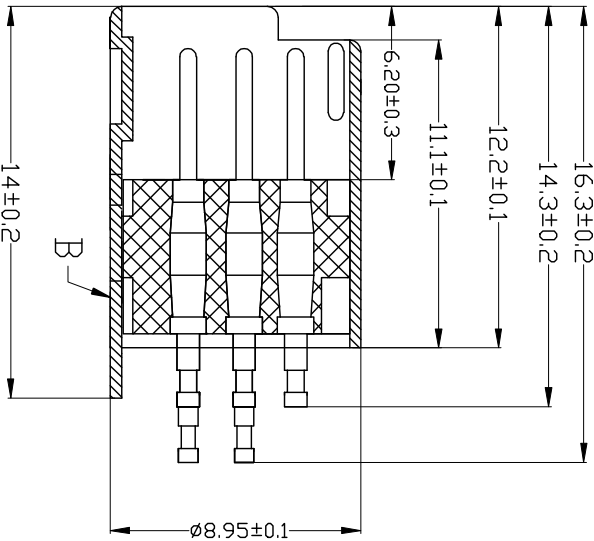
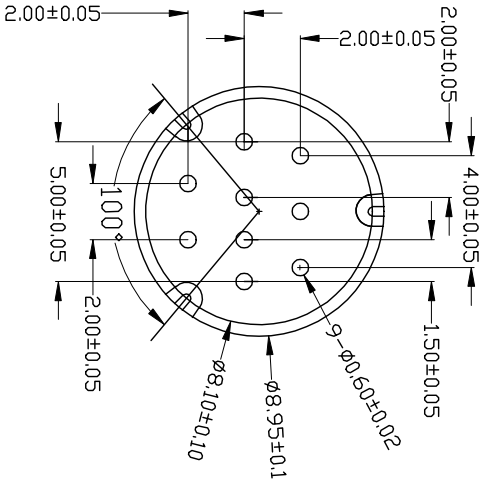
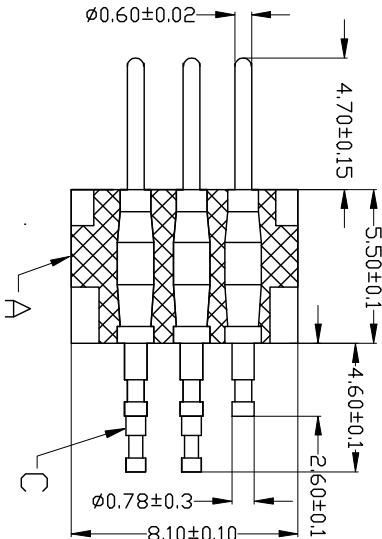


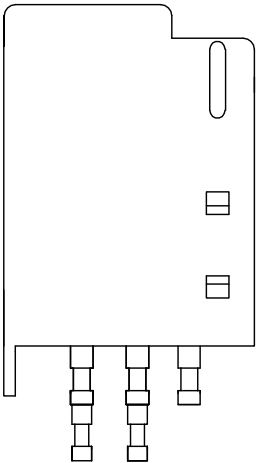

PARTS				MATERIALS				TREATMENT				AMOUNT			
A				HOUSING				PBT+GF				BLACK			
B				CONTACT				BRASS				GOLD PLATED SILVER PLATED GOLD PLATED NICKEL PLATED			
C				OUTER CONTACT				BRASS				1			
D															
E															
F															
Engagement force				≤50N				Rated voltage				24V			
Disengagement force				≥20N				Rated current				2A			
Mechanical lifespan				≥2000				Insulation resistance				≥1000M Ω			
IP rating								Contact resistance				≤10m Ω			
Flammability				UL94 V-0				Operation Temperature				-25° C~85° C			

Dongguan Changjun Electronics Co., Ltd
东莞市昌骏电子有限公司

TOLERANCE				TITLE:			
.xxx				mini DIN 外带线端公头 (车针) 三针加长			
.xx				PART NO: CJ-M09-M11			
.x				SHEET: 1 / 1			
ANGLES ± 1°				SCALE: 1 : 1			
				UNIT: mm			
				SIZE: A4			
				REV: A/0			
DRAWN: Xie Wenjun				CHECK: Long Jiehang			
				DATE: 2022-01-05			