










A								
	1	2	3	5	6pin258°	6pin(8改6)	7pin	8pin
B								
	2pin	3pin	4pin	5pin	6pin258°	6pin(8改6)	7pin	8pin

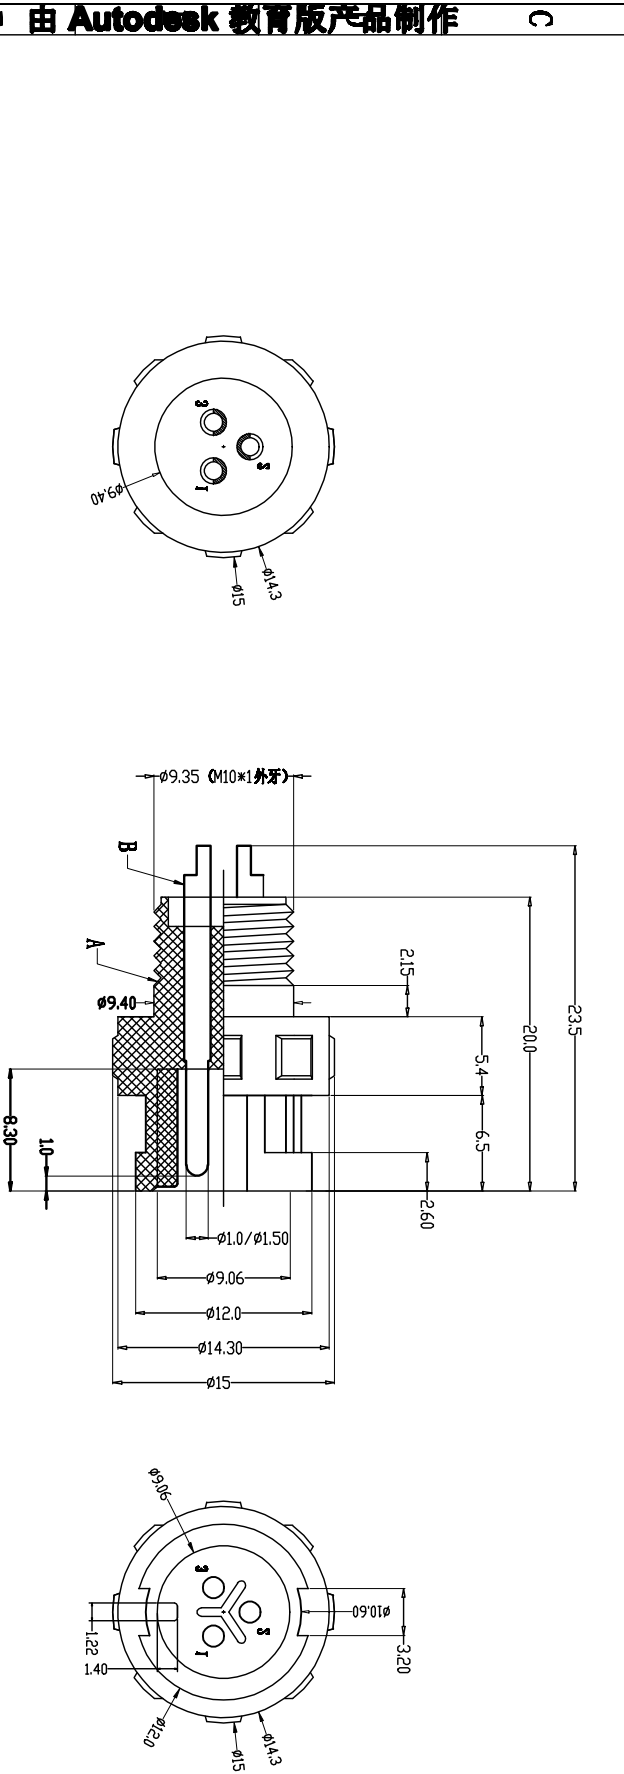

G	Dongguan Changjun Electronics Co., LTD 东莞市昌骏电子有限公司									
			PARTS		MATERIALS		TREATMENT		AMOUNT	
			A		HOUSING		PAGE+GF		BLACK	
			CONTACT		BRASS		GOLD PLATED		2~8	
	Engagement force		≤50N		Rated voltage		2-pole: 250V 3-pole: 250V 4-pole: 250V		B	
	Disengagement force		≥5N		Rated current		2-pole: 7.5A 4-pole: 4A		C	
	Mechanical lifespan		≥500		Insulation resistance		≥1000M Ω		D	
	IP rating		IP67/IP68		Contact resistance		≤10m Ω		E	
	Flammability		UL94 V-0		Operation Temperature		-40° C~105° C		F	