
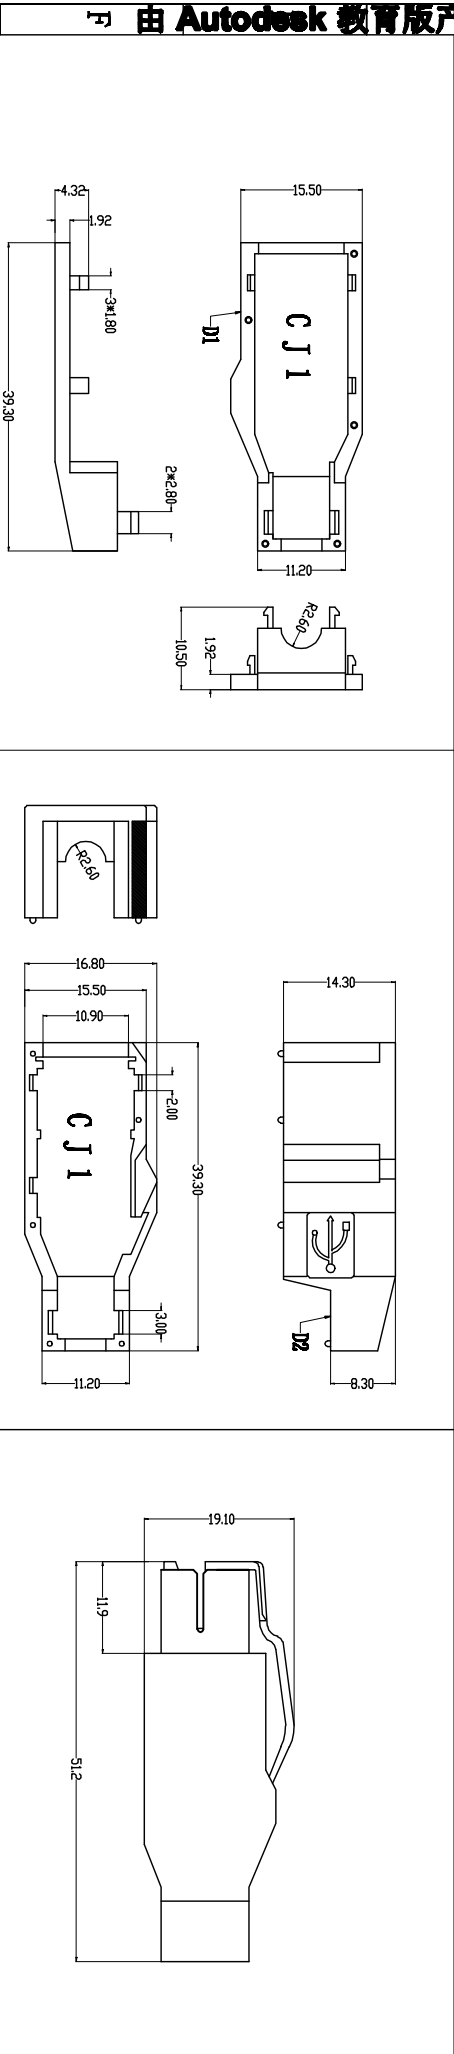


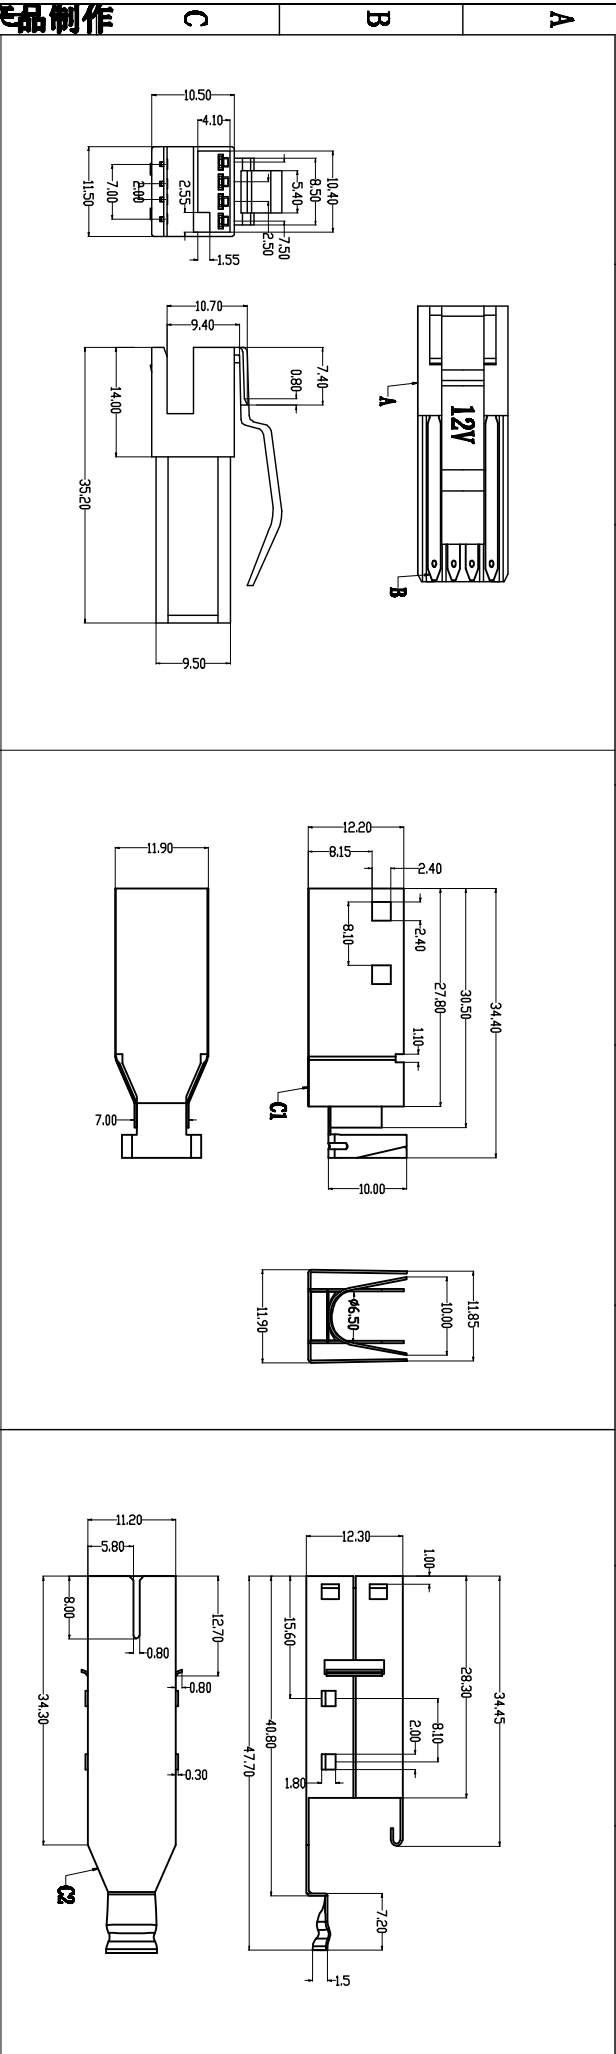

PARTS	MATERIALS	TREATMENT	AMOUNT
A HOUSING	PA66+GF	BLUE	1
B CONTACT	BRASS		8
C OUTER CONTACT	BRASS	NICKEL PLATED	1+1
D SHELL	ABS	SPECIFY COLOR	1+1
E			
F			

Dongguan Changjun Electronics Co., LTD
东莞市昌骏电子有限公司

Engagement force	≤30N	Rated voltage	250V
Disengagement force	≥50N	Rated current	1.5A
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ
IP rating		Contact resistance	≤10mΩ
Flammability	UL94 V-0	Operation Temperature	-25° C~85° C