
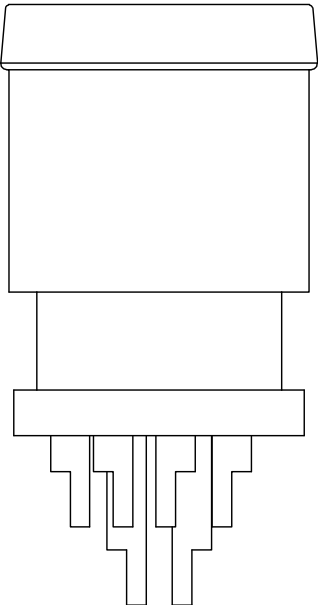
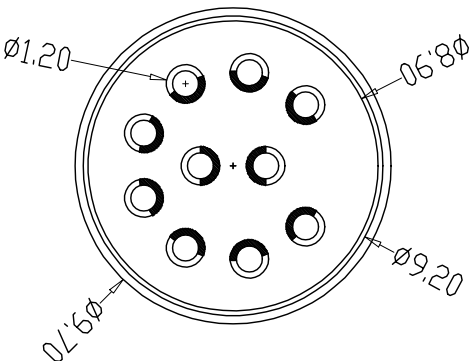


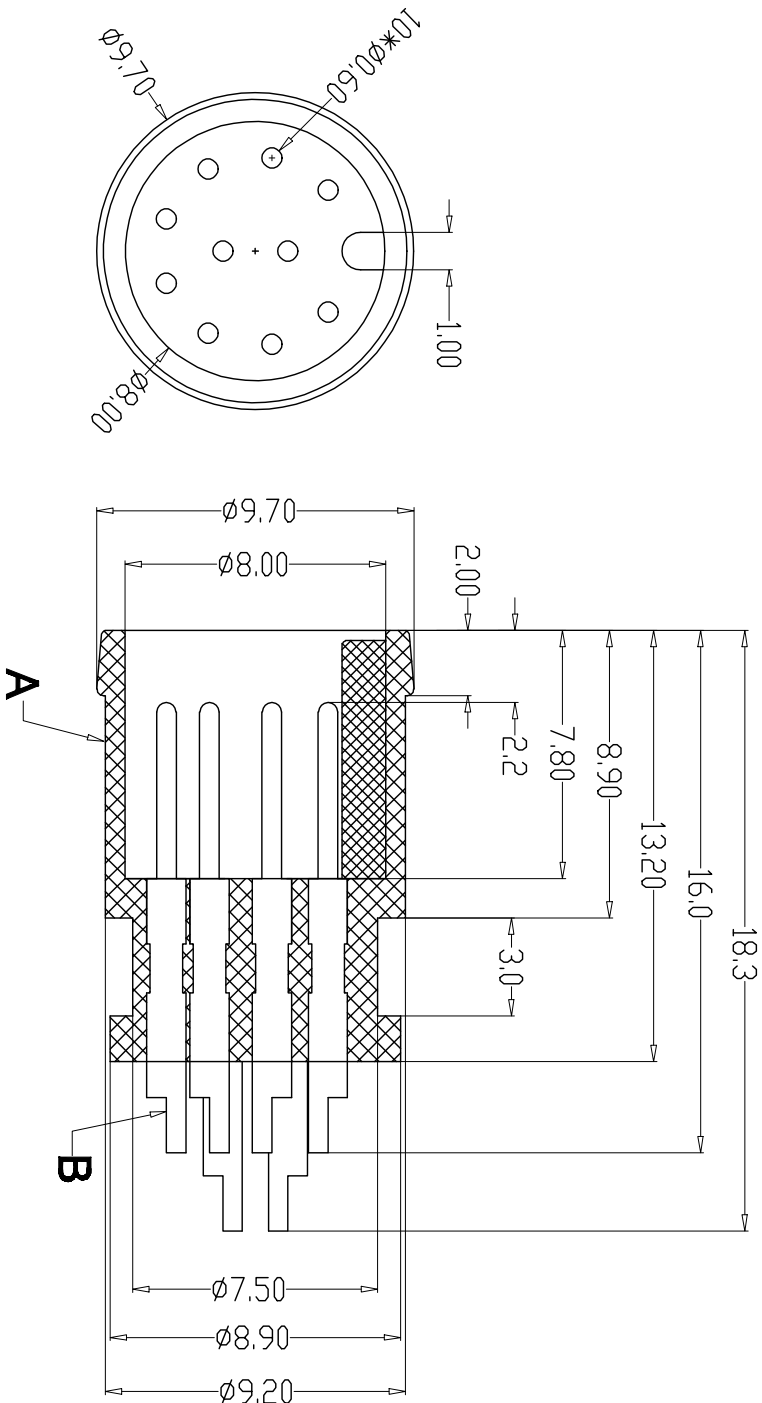

G					Dongguan Changjun Electronics Co., Ltd						
					东莞市昌骏电子有限公司						
		PARTS		MATERIALS		TREATMENT		AMOUNT			
		A		HOUSING		PA66+GF		BLACK		1	
		B		CONTACT		BRASS		GOLD PLATED		10	
Engagement force		≤55N		Rated voltage		24V					
Disengagement force		≥25N		Rated current		2A				C	
Mechanical lifespan		≥500		Insulation resistance		≥1000MΩ				D	
IP rating				Contact resistance		≤10mΩ				E	
Flammability		UL94 V-0		Operation Temperature		-25° C~85° C				F	
H											
		TOLERANCES									