

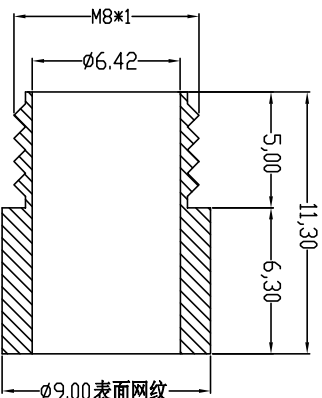

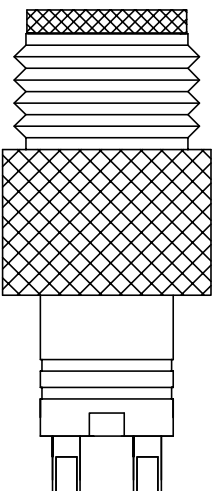

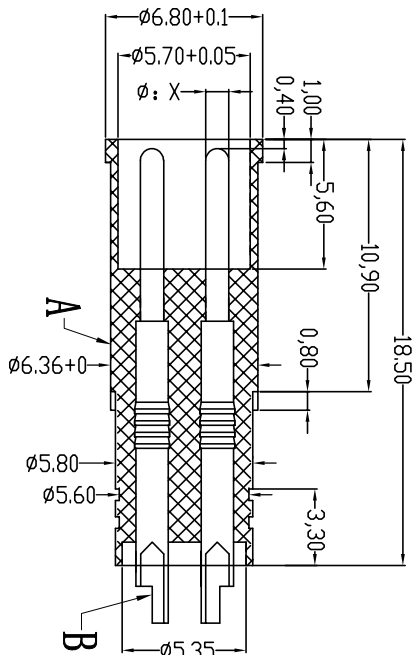
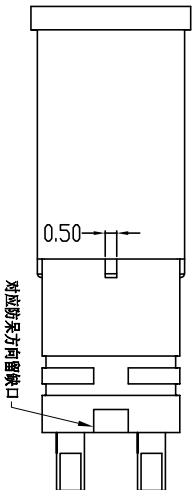


	2pin	3pin	4pin
图形			
CODE	A-防呆	A-防呆	A-防呆
X值	1.00	1.00	1.00



PARTS		MATERIALS		TREATMENT		AMOUNT	
A	HOUSING	PA66+GF		SPECIFY COLOR		1	
B	CONTACT	BRASS		GOLD PLATED		2~4	
C	NUT	BRASS		NICKL PLATED		1	
Engagement force		≤40N	Rated voltage	2~4pin:60V DC			
Disengagement force		≥5N	Rated current	2~4pin:4A			
Mechanical lifespan		≥500	Insulation resistance	≥1000M Ω			
IP rating		IP67/IP68	Contact resistance	≤10m Ω			
Flammability		UL94 V-0	Operation Temperature	-40° C~105° C			
1		2	3	4	5	6	
Dongguan Changjun Electronics Co., Ltd 东莞市昌骏电子有限公司		TITLE:		TOLERANCE		DRAWING NO.:	
		18防呆2~4线插头C-防呆款+9*11.3L网纹螺丝		±0.05 ±0.10 ±0.30 ±0.50		CP-M80001	
		PART NO:		SHEET:		UNIT:	
		1 / 1		1 : 1		mm	
DRAWN:		CHECK:		DATE:		REV	
Xie Wenjun		Long Jichang		2023-04-06		A/0	