
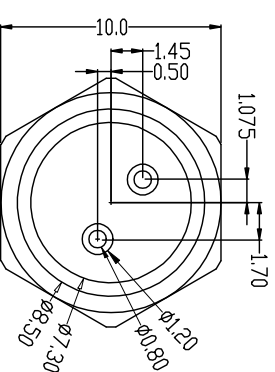

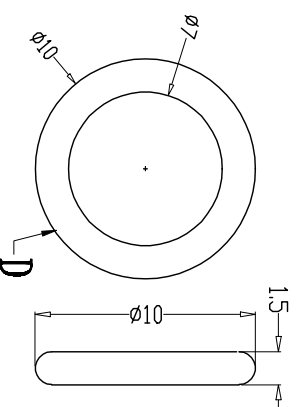
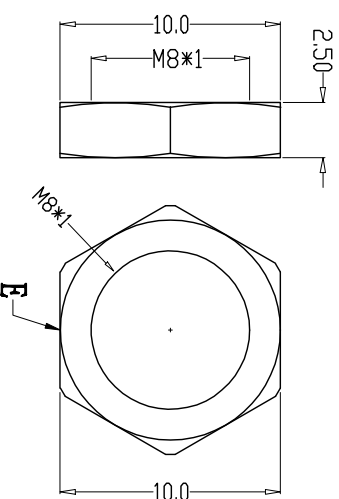
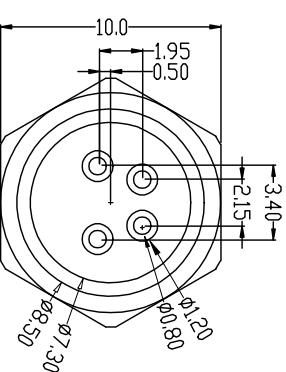
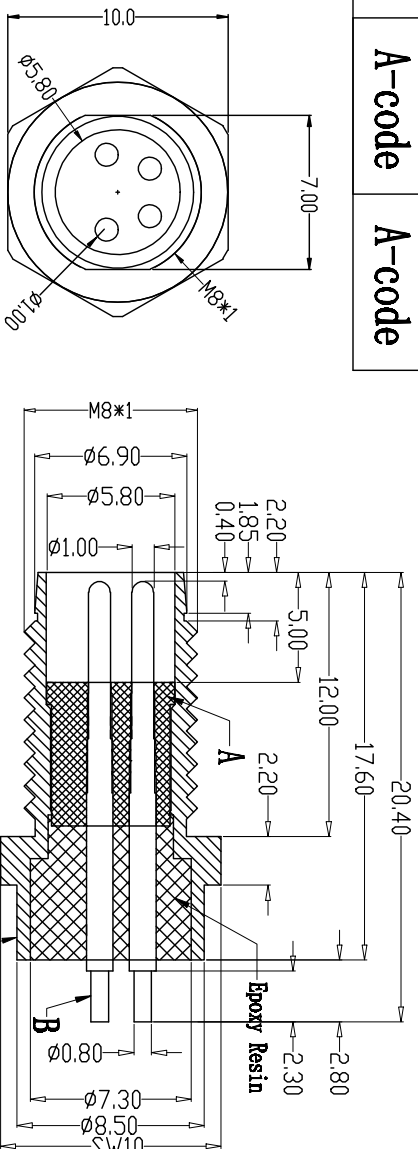
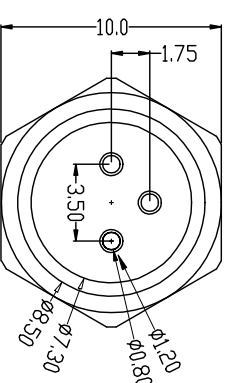


		1		2			
A		2pin	3pin	4pin			
	图形						
B	CODE	A-code	A-code	A-code			

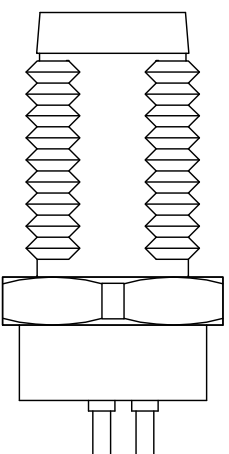

Recommended Panel Cut-out

	PARTS	MATERIALS	TREATMENT	AMOUNT
A	HOUSING	PA66+GF	SPECIFY COLOR	1

Dongguan Changjun Electronics Co., Ltd
东莞市昌骏电子有限公司

	Engagement force	≤30N	Rated voltage	60V	B	CONTACT	BRASS	GOLD PLATED	2~4
	Disengagement force	≥5N	Rated current	4A	C	OUTER CONTACT	BRASS	NICKEL PLATED	1
	Mechanical lifespan	≥500	Insulation resistance	≥1000M Ω	D	O-RING	EPDM	BLACK	1
H	IP rating	IP67/IP68	Contact resistance	≤10m Ω	E	NUT	BRASS	NICKEL PLATED	1
	Flammability	UL94 V-0	Operation Temperature	-40° C~105° C	F				

		TOLERANCES .XXX ±0.05 .XX ±0.10 .X ±0.30 Z ±0.50 ANGLES ±1°	
TITLE: 规格为“P”模锻公头 前模面模式B SHOT-17, 仅含公头		DRAWING NO.: CP-4690029	
DRAWN: Xie Youtjun		CHECK: Long Jiahong	
DATE: 2022-01-05		DATE: 2022-01-05	