

1

2

3

由 Autodesk 教育版产品制作

6

7

8

A

A

B

B

C












C

F

F

G

G

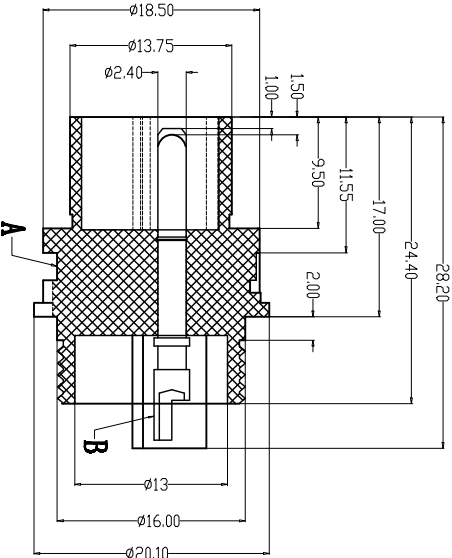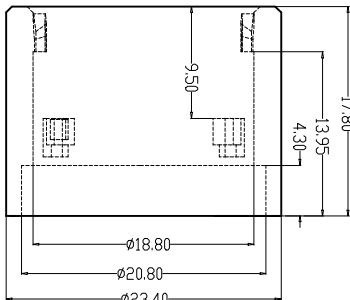

H

H

1

2

3

由 Autodesk 教育版产品制作

6

7

8

Engagement force	≤50N	Rated voltage	220V
Disengagement force	≥80N	Rated current	25A
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ
IP rating	IP67	Contact resistance	≤10mΩ
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C

	PARTS	MATERIALS	TREATMENT	AMOUNT
A	HOUSING	PA66+GF	BLACK	1
B	CONTACT	BRASS	GOLD PLATED	2
C	NUT	PA66+GF	BLUE	1
D	O-RING	EPDM	BLACK	1
E	SPRING	SS	NICKL. PLATED	1
F				

TOLERANCE				TITLE:			
.xxx ±0.05				18级津发白铜佳康2P(或2)终端公头			
.xx ±0.10				PART NO:			
.x ±0.20				CJ-ZS180Y5-M01			
ANGLES ± 1°				DRAFTING NO.:			
DRAWN: Xie Wenjun				CHECK: Long Jichang			
DATE: 2022-01-05				UNIT: mm			
				SIZE: A4			
				REV: A/0			

Dongguan Changjun Electronics Co., LTD
东莞市昌骏电子有限公司