

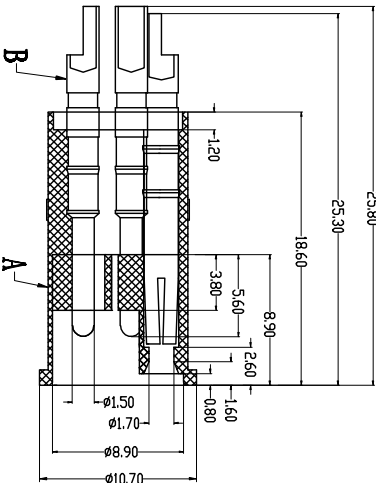
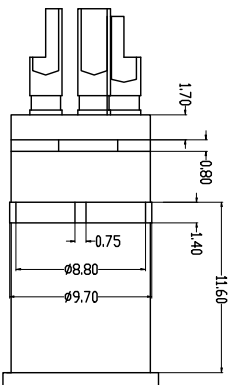

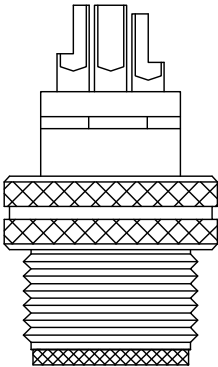



1			2		
pin位	3pin	4pin	5pin		
图形					

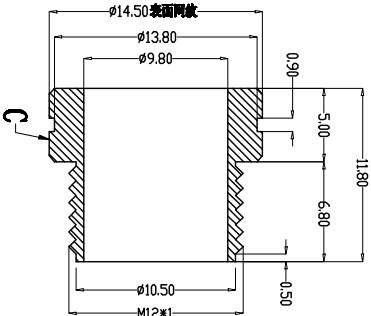

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

PARTS	MATERIALS	TREATMENT	AMOUNT
A	HOUSING	PA66+GF	SPECIFY COLOR
B	CONTACT	BRASS	GOLD PLATED
C	NUT	BRASS	NICKEL PLATED
D			
E			
F			

Dongguan Changjun Electronics Co., Ltd
东莞市昌骏电子有限公司

Engagement force	≤50N	Rated voltage	63V
Disengagement force	≥10N	Rated current	16A
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ
IP rating	IP67/IP68	Contact resistance	≤10mΩ
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C

TOLERANCE	TITLE:
.xxx ±0.05	M12防水5芯接插件-008+1L 8孔间距0.8mm
.xx ±0.10	PART NO:
.x ±0.20	GT-M12x5.0/L-001
ANGLES ±1°	DRAWING NO.:
	CP-M120153

SHEET:	SCALE:	UNIT:	SIZE:	REV
1 / 1	1 : 1	mm	A4	N/A

DRAWN:	CHECK:	DATE:
Xie Wenjun	Long Jiehang	2022-01-05

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---