
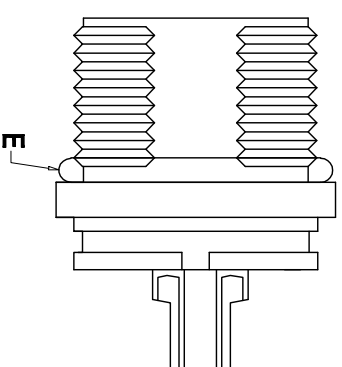

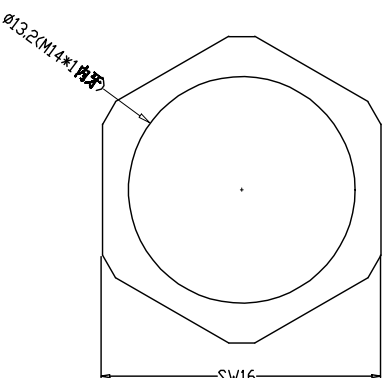
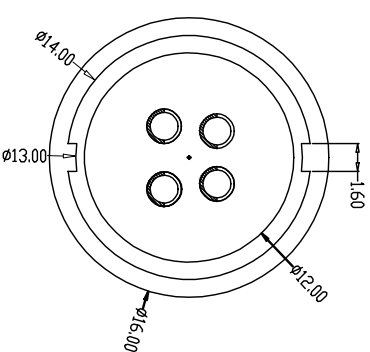
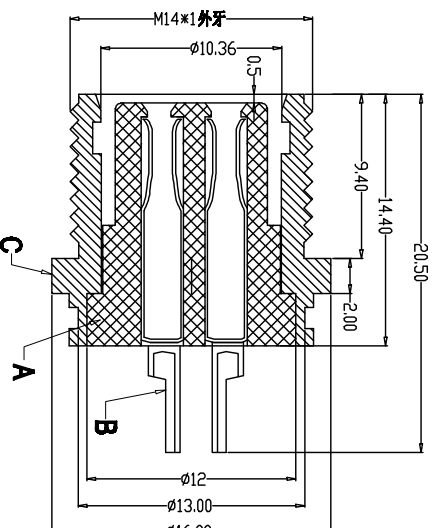


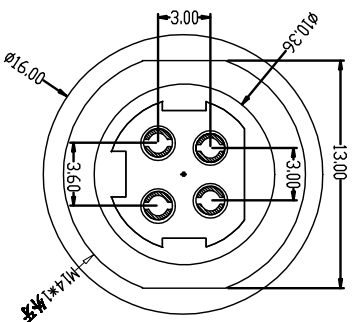

				PARTS		MATERIALS		TREATMENT		AMOUNT			
				A		HOUSING		PBT+GF		BLACK		1	
				B		CONTACT		BRONZE		SILVER PLATED		4	
				C		OUTER CONTACT		BRASS		NICKEL PLATED		1	
Engagement force				≤35N		Rated voltage		24V					
Disengagement force				≥35N		Rated current		7.5A				D	
Mechanical lifespan				≥1000		Insulation resistance		≥1000MΩ		BLACK		E	
IP rating						Contact resistance		≤30mΩ				F	
Flammability				UL94 V-0		Operation Temperature		-25° C~85° C				G	

Dongguan Changjun Electronics Co.,Ltd											
东莞市昌骏电子有限公司											
TITLE: POWER DIN 42线插头 前锁面式DIN4 Pin6											
TOLERANCES				DRAWING NO.: GP-POWER0020							
.XXX ±0.05				PART NO: CJ-PD4-F01G-M16T							
.XX ±0.10				SHEET: SCALE: 1:1							
.X ±0.20				UNIT: SIZE: A4							
ANGLES ± 1°				DATE: 2022-01-05							
CHECK: Xie FeiJun				DRAWN: Long Jiehang							