




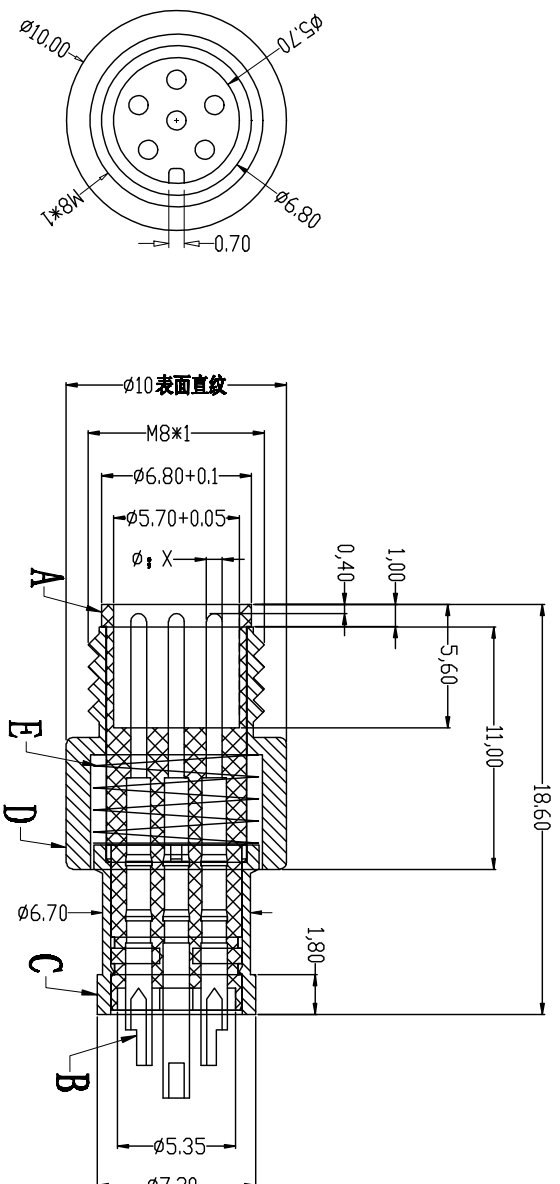


		1			2		3		4	
A		2pin	3pin	4pin	5pin	6pin	8pin			
图形										
B	CODE	A-code	A-code	A-code	B-code	A-code	A-code			
	X值	1.00	1.00	1.00	1.00	0.72	0.60			

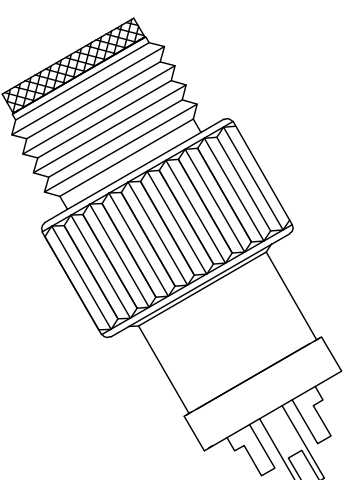

由 Autodesk 教育版产品制作

G	Engagement force	≤40N	Rated voltage	2-5pin:60V DC 6-9pin:30V DC
	Disengagement force	≥5N	Rated current	2-5pin:4A 6-9pin:2A
	Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ
H	IP rating	IP67/IP68	Contact resistance	≤10mΩ
	Flammability	UL94 V-0	Operation Temperature	-40° C~105° C

	PARTS	MATERIALS	TREATMENT	AMOUNT
A	HOUSING	PAGE+GF	SPECIFY COLOR	1
B	CONTACT	BRASS	GOLD PLATED	2*8
C	SHIELD	BRASS	NICKL. PLATED	1
D	NOT	BRASS	NICKL. PLATED	1
E	SPRING	SS	NICKL. PLATED	1
F				

 		TOLERANCE .XX ± 0.06 .XX ± 0.10 .X ± 0.30 X ± 0.50 ANGLE ± 1°	
TITLE: 防水2芯插线公头屏蔽板(11)带背胶铜丝		PART NO.: GJ-MSB003	
SHEET: 1 / 1		SCALE: 1 : 1	
DRAWING NO.: GJ-MSB003		UNIT: mm	
DATE: 2022-01-05		SIZE: REV A/0	
Xie Wenjun		Long Jiahong	

由 Autodesk 教育版产品制作