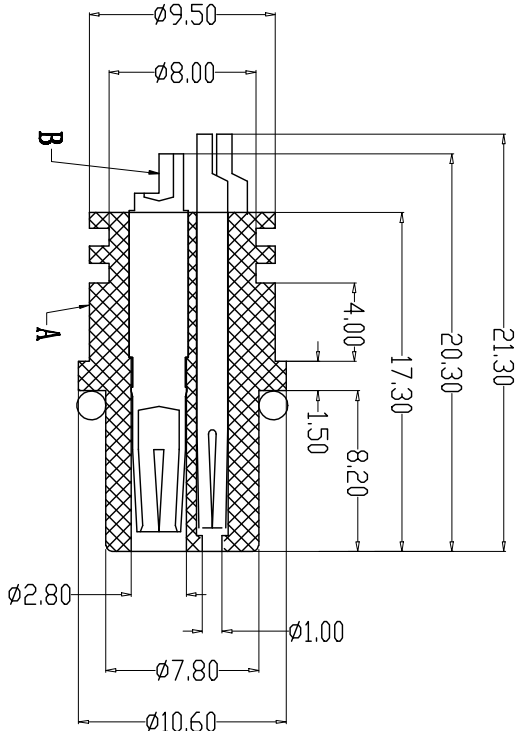



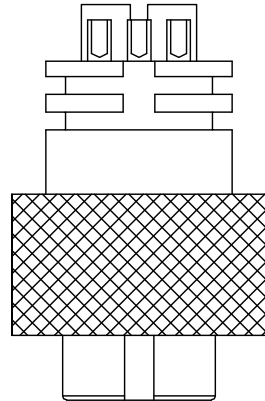

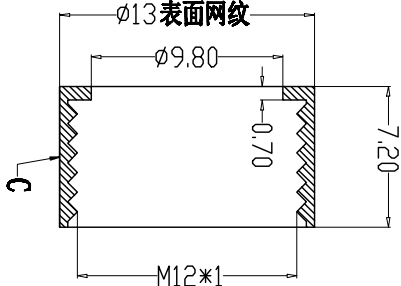


由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

| Dongguan Changjun Electronics Co., LTD |  |                          |  |              |  |            |  |  |  |
|----------------------------------------|--|--------------------------|--|--------------|--|------------|--|--|--|
| 东莞市昌骏电子有限公司                            |  |                          |  |              |  |            |  |  |  |
| TITLE:                                 |  | T-M12防水5P(2+3)线端母头       |  |              |  |            |  |  |  |
| TOLERANCES                             |  | DRAWING NO.: CJ-M12T0002 |  |              |  |            |  |  |  |
| .xxx ±0.05                             |  | PART NO: CJ-M12T00- F01  |  |              |  |            |  |  |  |
| .xx ±0.10                              |  | SHEET: 1                 |  |              |  |            |  |  |  |
| .x ±0.30                               |  | SCALE: mm                |  |              |  |            |  |  |  |
| x ±0.50                                |  | UNIT: mm                 |  |              |  |            |  |  |  |
| ANGLES ± 1°                            |  | SIZE: A4                 |  |              |  |            |  |  |  |
|                                        |  | REV: A/0                 |  |              |  |            |  |  |  |
|                                        |  | DATE:                    |  |              |  |            |  |  |  |
|                                        |  | DRAWN:                   |  | CHECK:       |  | DATE:      |  |  |  |
|                                        |  | Xie Wenjun               |  | Long Jiahang |  | 2022-01-05 |  |  |  |

| G                | PARTS               |          | MATERIALS             | TREATMENT     | AMOUNT  |        |             |               |   |
|------------------|---------------------|----------|-----------------------|---------------|---------|--------|-------------|---------------|---|
|                  | A                   | HOUSING  |                       |               |         |        |             |               |   |
| Engagement force | ≤20N                |          | 220V                  | B             | CONTACT | BRONZE | GOLD PLATED | 2+3           |   |
|                  | Disengagement force | ≥5N      | Rated current         | 20A           | C       | NUT    | BRASS       | NICKEL PLATED | 1 |
|                  | Mechanical lifespan | ≥500     | Insulation resistance | ≥1000MΩ       | D       | O-RING | EPDM        | BLACK         | 1 |
|                  | IP rating           | IP67     | Contact resistance    | ≤10mΩ         | E       |        |             |               |   |
|                  | Flammability        | UL94 V-0 | Operation Temperature | -40° C~105° C | F       |        |             |               |   |