
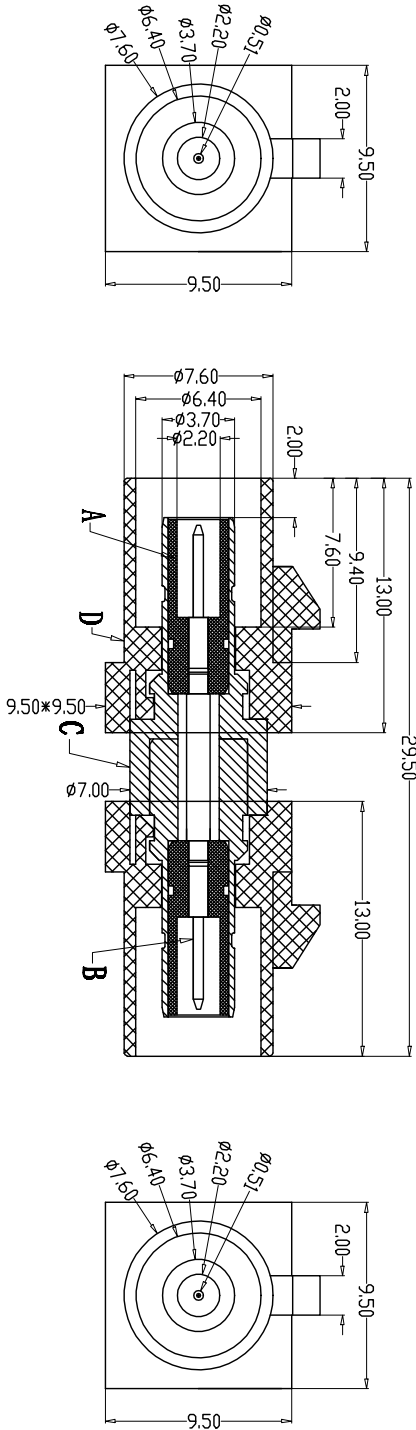


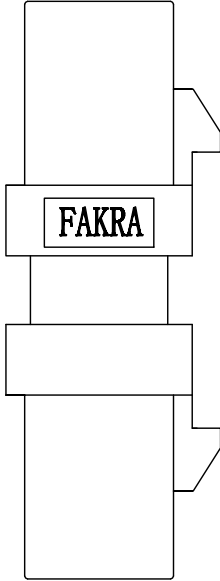

编码	图 形	颜 色	编码	图 形	颜 色
A		黑 色	G		灰 色
B		白 色	H		石南紫色
C		蓝 色	I		米黄色
D		酒红紫色	K		咖厘色
E		绿 色	L		黄绿色
F		咖啡色	M		浅橙色
Z		水蓝色	N		浅绿色

Engagement force		Dielectric Strength		PARTS		TREATMENT	
Disengagement force	≥5N	Rated voltage	350V/(rms)	A	HOUSING	PTFE	NATURAL COLOR
Retention	≥110N	Frequency Range	DC to 6 GHz	B	CONTACT	BRASS	GOLD PLATED
Mechanical lifespan	≥500	Voltage standing wave ratio	<1.30 (DC-3GHz)	C	OUTER CONTACT	BRASS	NICKEL PLATED
IP rating	IP67/IP68	Insulation resistance	<1.40 (3GHz-6GHz)	D	SHELL	PBT+GF	SPECIFY COLOR
Operation Temperature	-40° C~105° C	Contact resistance	≤5m Ω	E			
RF Leakage	≥65 dB	Insertion Loss	<0.1x √f (GHz) dB	F			
Engagement force		Dielectric Strength		PARTS		TREATMENT	
Disengagement force	≥5N	Rated voltage	350V/(rms)	A	HOUSING	PTFE	NATURAL COLOR
Retention	≥110N	Frequency Range	DC to 6 GHz	B	CONTACT	BRASS	GOLD PLATED
Mechanical lifespan	≥500	Voltage standing wave ratio	<1.30 (DC-3GHz)	C	OUTER CONTACT	BRASS	NICKEL PLATED
IP rating	IP67/IP68	Insulation resistance	<1.40 (3GHz-6GHz)	D	SHELL	PBT+GF	SPECIFY COLOR
Operation Temperature	-40° C~105° C	Contact resistance	≤5m Ω	E			
RF Leakage	≥65 dB	Insertion Loss	<0.1x √f (GHz) dB	F			

东莞市昌骏电子有限公司

东 莞 市 昌 骏 电 子 有 限 公 司

TOLERANCE		TITLE:	
.xxx	±0.05	PART NO:	
.xx	±0.02	CJ-FAKRA-7-4M01	
.x	±0.01	DRAFTING NO.:	
±0.50	±0.50	CP-FAKRA0011	
± 1°	± 1°	SHEET:	
± 1°	± 1°	1 / 1	
± 1°	± 1°	SCALE:	
± 1°	± 1°	1 : 1	
± 1°	± 1°	UNIT:	
± 1°	± 1°	mm	
± 1°	± 1°	SIZE:	
± 1°	± 1°	A4	
± 1°	± 1°	REV	
± 1°	± 1°	A/0	
± 1°	± 1°	DATE:	
± 1°	± 1°	2022-01-05	

DRW: Xie Wenjun

CHECK: Long Jichang

DATE: 2022-01-05