


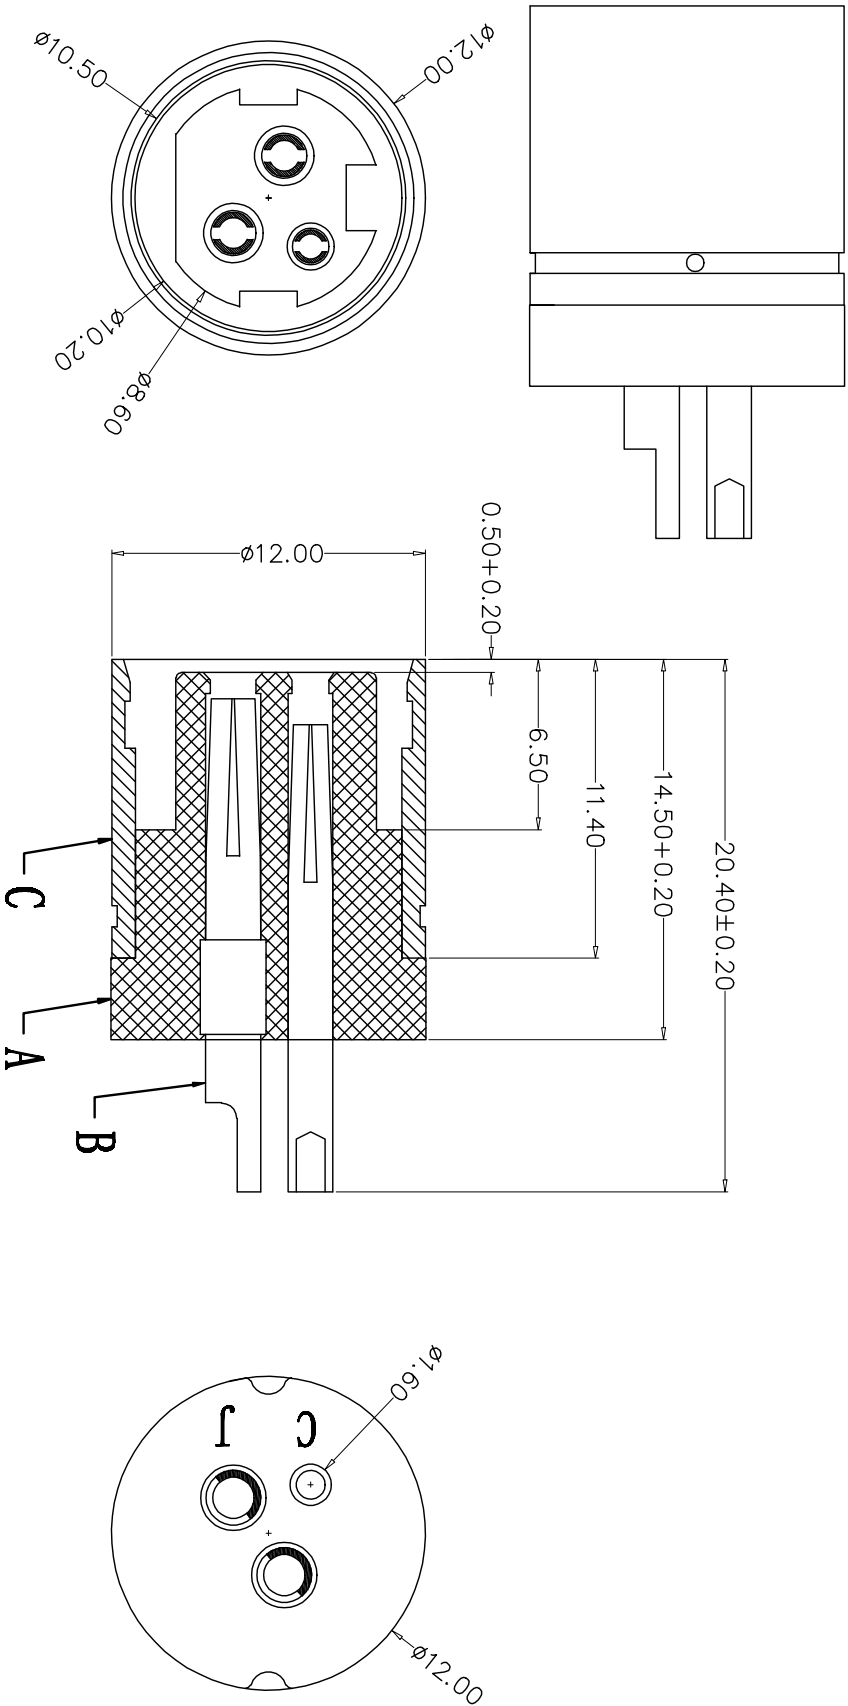

				PARTS				MATERIALS				TREATMENT				AMOUNT			
A				HOUSING				PBT+GF				BLACK				1			
B				CONTACT				BRONZE				SILVER PLATED				3			
C				OUTER CONTACT				BRASS				NICKEL PLATED				1			
D																			
E																			
F																			
G																			
H																			
I																			

Engagement force	≤35N	Rated voltage	pin 1 and 2 24V pin 3 24V
Disengagement force	≥35N	Rated current	pin 1 and 2 7.5A pin 3 1A
Mechanical lifespan	≥1000	Insulation resistance	≥1000MΩ
IP rating		Contact resistance	≤30mΩ
Flammability	UL94 V-0	Operation Temperature	-25° C~85° C

Dongguan Changjun Electronics Co., Ltd

东莞市昌骏电子有限公司

TITLE: POWER DIN 3P 线端母头

PART NO: CJ-PDG-F01

SHEET: 1 / 1

SCALE: 1 : 1

UNIT: mm

DRAWING NO.: CJ-POWER0015

SIZE: A4

REV: A/0

DRAWN: Xie Wenjun

CHECK: Long Jichang

DATE: 2022-01-05