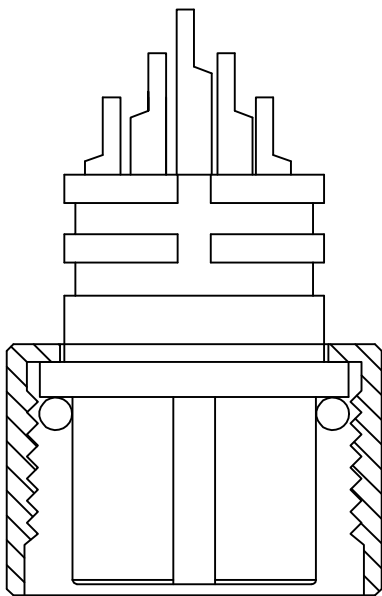
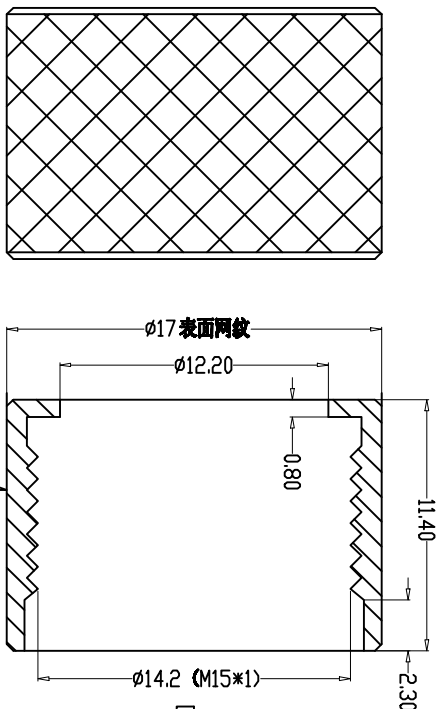
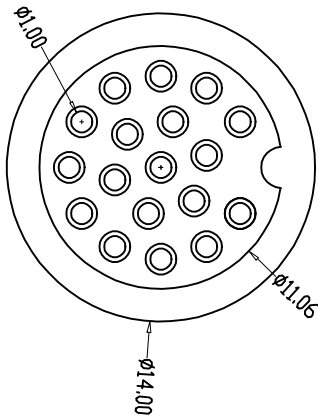
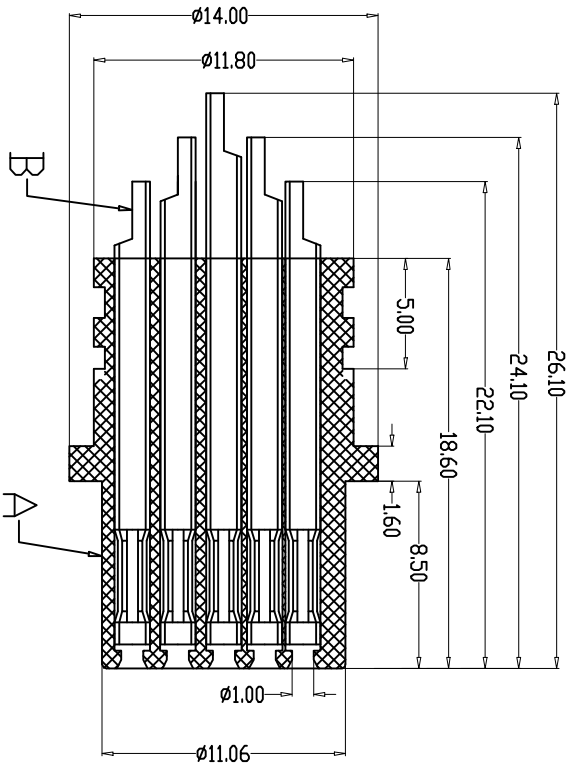
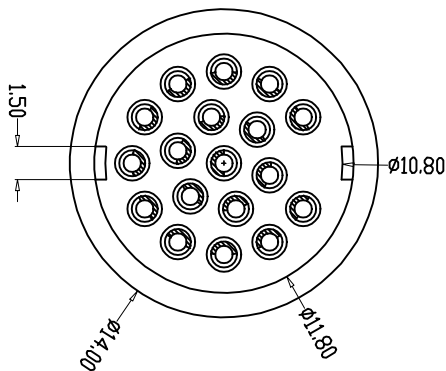


由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

Engagement force	≤50N	Rated voltage	30V
Disengagement force	≥18N	Rated current	3A
Mechanical Lifespan	≥500	Insulation resistance	≥1000MΩ
IP rating	IP67/IP68	Contact resistance	≤10mΩ
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C

PARTS	MATERIALS	TREATMENT	AMOUNT
A HOUSING	PA66+GF	SPECIFY COLOR	1
B CONTACT	BRASS	GOLD PLATED	18
C NUT	ALALLOY	BLACK	1
D O-RING	EPDM	BLACK	1

TOLERANCE

±0.05
±0.10
±0.20
±0.50
±1°

ANGLE

1°

TITLE: M16防水180线端母头+11.4L网纹螺母

PART NO: GZ-M160002

DRAWING NO.: GZ-M160002

SCALE: 1:1

UNIT: mm

SIZE: A4

REV: A/0

DRAWN: Xie Yanyun

CHECK: Long Jichang

DATE: 2022-01-05

东莞市昌骏电子有限公司