





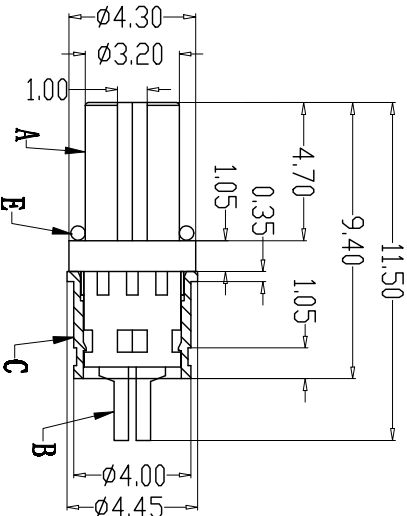
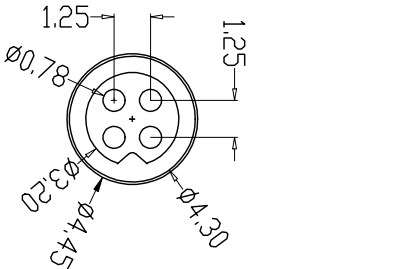

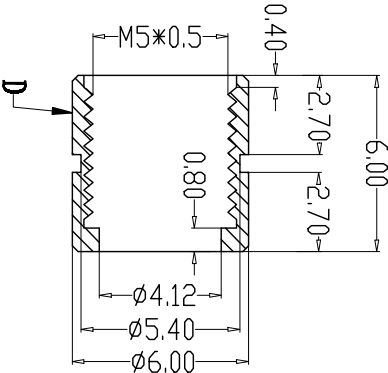


1		2		3		4		
PIN数		2Pin	3Pin	3Pin		4Pin	4Pin	
图 形								



G				H			
Engagement force		≤30N	Rated voltage	60V	Disengagement force		≥5N
Mechanical lifespan		≥500	Insulation resistance	≥1000MΩ	IP rating		IP67/IP68
Flammability		UL94 V-0	Operation Temperature	-40° C~105° C	Contact resistance		≤10mΩ

PARTS				MATERIALS				TREATMENT				AMOUNT			
A		HOUSING		PA66+GF		GOLD PLATED		1		2*4		1		1	
B		CONTACT		BRONZE		NICKEL PLATED		1		1		1		1	
C		SHIELD		BRASS		NICKEL PLATED		1		1		1		1	
D		NUT		BRASS		NICKEL PLATED		1		1		1		1	
E		O-RING		EPDM		BLACK		1		1		1		1	

Dongguan Changjun Electronics Co., Ltd
东莞市昌骏电子有限公司

TITLE: 防水2*4线端子母头屏蔽款+网纹螺母

PART NO: CJ-MAB2*4-F11P9

SCALE: 1:1

UNIT: mm

DATE: 2022-01-05