由 Autodesk 教育版产品制作

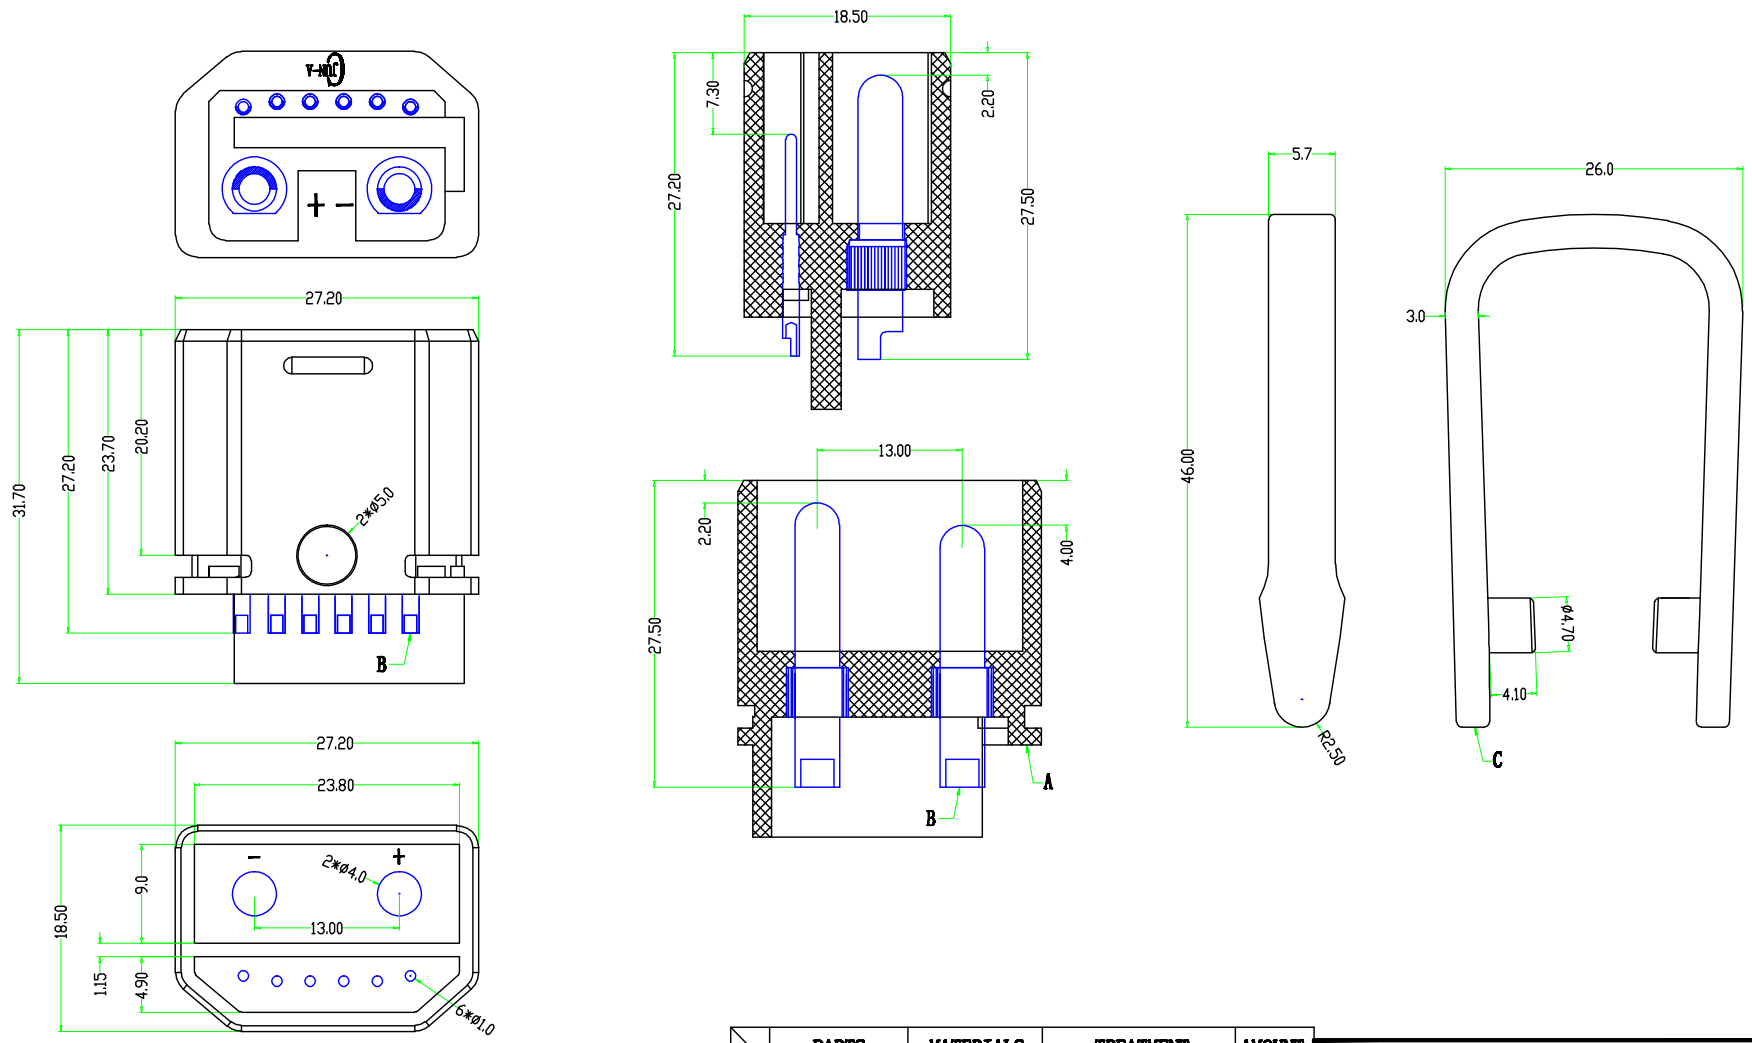

Engagement force	≤80N	Rated volage	220V
Disengagement force	≥35N	Rated current	60A
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ
IP rating	IP65/IP67	Contact resistance	≤10mΩ
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C

	PARTS	MATERIALS	TREATMENT	AMOUNT
A	HOUSING	PA66+GF	BLACK	1
B	CONTACT	BRASS	GOLD PLATED	2+6
C	HAND RING	PA66+GF	BLACK	1
D				
E				
F				

Dongguan JunHao Interconnection Technology Co.,Ltd

东莞市俊豪互联科技有限公司

TOLERANCE: .xxx ±0.05; .xx ±0.10; .x ±0.30; x ±0.50; ANGLE ± 1°

TITLE: 菱形电源防水RP(2+6)线端公头

PART NO: JH-LXDY0-001

DRAWING NO.: CP-LXDY0001

SHEET: 1 / 1 | SCALE: 1 : 1 | UNIT: mm | SIZE: A4 | REV: A/0

DRAWN: Xie Wenjun | CHECK: Long Jichang | DATE: 2022-01-05

由 Autodesk 教育版产品制作
由 Autodesk 教育版产品制作
由 Autodesk 教育版产品制作